Andreas [NL/NL]; Muldersweg 8, NL-5051 NN Goirle (NL).

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR MEASURING THE EFFORT MADE BY A CYCLIST
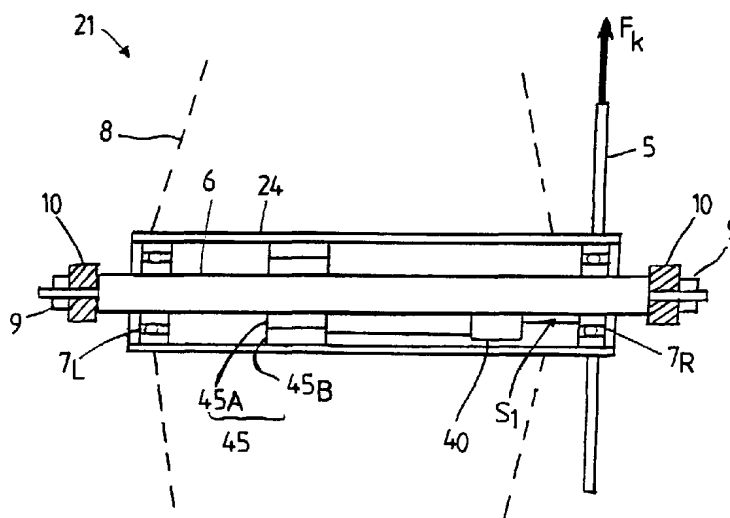
(57) Abstract: The level of a force or torque (T) exerted by a rider on the pedals (27) of a bicycle (1) is calculated by a signal-processing device (40) on the basis of a measurement signal which is obtained from a sensor (50) which is attached to the frame (10) of the bicycle in order to measure the deformation which occurs in the frame. The sensor (50) may comprise one or more strain gauges. Furthermore, the invention describes a way of actuating a hub motor (45) on the basis of the chain force. This arrangement always offers the considerable advantage that a single sensor (74; 50) is sufficient, and that this sensor can be mounted on the same bicycle component as that to which the control member (40) is attached, namely the rear axle (6) itself or the inner race (71) of the wheel bearing (7) which is fixed to the rear axle. A bending sensor (50) which is mounted on the rear axle measures the bending which occurs in the rear axle itself as a result of the pedalling force. A pressure sensor (74) which is mounted in the wheel bearing (7) measures the compressive forces caused in the wheel bearing by the chain force.

— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND DEVICE FOR MEASURING THE EFFORT MADE BY A CYCLIST

Title: Method and device for measuring an effort made by a
        cyclist, and method and device for measuring the tension
5   in a bicycle chain

        The present invention relates in particular to the
measurement of a force exerted by a cyclist, but the present
invention is more widely applicable.
10   In a first aspect, the present invention relates in
general terms to the measurement of a force or torque which is
exerted by a cyclist, as a measure of the effort made by that
cyclist. Measurement data of this nature is generally already of
use when athletes are training, possibly in combination with
15   heart rate measurements. Furthermore, this measurement data can
be used to control, inter alia, automatic acceleration systems.
Automatically changing acceleration systems for bicycles are
already known. Therein, the rotational speed of the crank system
is always used as the exclusive information source for
20   determining the moment of changing. However, this does not lead
to optimum changing, since the pedalling speed is not always a
good indication of the effort being made by the cyclist. Better
determination of the moment of changing can be achieved by using
both the pedalling speed and the pedalling force as information
25   sources.
        However, there is a need in particular for a measurement
as mentioned above in the field of electrically assisted
vehicles, i.e. vehicles which are provided with an electric
drive motor, the driving force supplied by the electric driving
30   motor being proportional to the effort made by the driver.
Therefore, in the following, the present invention will be
explained specifically for this application field, more
particularly the field of electrically assisted bicycles.
However, it is expressly pointed out that the present invention
35   is not restricted to the application field of electrically
assisted bicycles, but rather can also be used for other
vehicles which are driven by human force. It is also possible
for the present invention to be used for, for example, ordinary
bicycles or exercise machines of the bicycle type.

- 2 -

Furthermore, the present invention can be employed in conjunction with other auxiliary devices of which the control depends on the cycling performance, such as for example automatically changing acceleration systems for cyclists.

5   Vehicles which are driven by human force are generally known, and the bicycle is the most common application thereof. As is known, a bicycle comprises a frame and a crank system rotatably mounted in the frame, with a substantially horizontally oriented crank and two crank arms which are mounted

10   at the respective ends of the said crank, are perpendicular to the crank and are provided with pedals at their respective ends. The rider of the bicycle uses his feet to set the crank system in rotation with respect to the frame, and this rotation is transmitted, usually by means of sprockets and a chain, to at

15   least one of the wheels of the bicycle, usually the rear wheel. The pedalling force exerted by the rider is translated, via the lever action of the crank arms, into a driving moment or driving torque in the crank and, via the said transmission system, to the driven wheel.

20   In general, there is a need for auxiliary force means which enable the rider of the bicycle to achieve the same performance with reduced effort, such as when cycling into the wind or uphill. Bicycles which are provided with auxiliary force means of this nature are already known per se and, in the

25   context of the present invention, will be referred to by the term "electrically assisted bicycle". With bicycles of this type, an electric motor is provided, which is coupled to the crank system or the wheels, is powered from a battery and is actuated by a control member, for example a suitably programmed

30   microprocessor or the like. The actuation by the control member is generally dependent on the speed of the bicycle and on the force exerted by the rider. If the rider is not exerting any force on the pedals, the electric motor does not emit any power. If the rider is exerting a force on the pedals, the electric

35   motor does provide an auxiliary force. The characteristics of the auxiliary force, that is to say the ratio between the auxiliary force and the human force as a function of the human force and of the speed, can in principle be programmed as desired; usually, the said ratio is constant until a certain

speed threshold is reached, and then decreases to zero above
this speed threshold. Consequently, the objective cycling
performance, such as speed, will still be dependent on the level
of effort made by the cyclist, but this effort will be

5   considerably less than if the auxiliary source of force were
absent.

        In order to be able to actuate the electric motor with a
variable power depending on the pedalling force provided by the
rider, it is necessary for the control member to be provided

10   with a pedalling-force sensor which is able to measure the
pedalling force provided by the rider or at least to generate a
signal which is representative of this pedalling force. Various
proposals for such pedalling-force sensors have been made in the
prior art. American patent 5.915.493 describes a complicated

15   mechanical structure for measuring the pedalling torque in the
crank system. This mechanical structure comprises a planetary
system with a sun gear to which a spring-loaded lever is
attached. When a pedalling force is exerted, the sun gear will
turn a little, counter to the spring force, and the extent of

20   rotation of the said sun gear is a measure of the force supplied
by the rider. However, this known system is complicated, large
and heavy. It requires gears and bearings as well as a closed
housing and a large number of moving components, making the
system heavy and expensive. Furthermore, friction occurs in the

25   system, with the result that there is a reduction in effective
pedalling force and undesirable noise is produced. Furthermore,
the fact that hysteresis effects occur in the system is a
fundamental drawback to measuring the reaction torque of a sun
gear. On account of the necessary depression of a spring for the

30   actuation of a potentiometer, the reaction time of the torque-
measuring system will show a delay compared to a crank system
without such a spring, with the result that both the cycling
sensation and the control signal to the control unit
deteriorate. Moreover, there is a need for a force-measuring

35   system which can easily be arranged on "ordinary" bicycles, i.e.
bicycles which are not provided with an auxiliary power source;
the system known from the said publication is not suitable for
this purpose.

- 4 -

American patent 5.027.303 describes a measuring system
in which the crank and/or the sprocket is provided with strain
gauges. A significant drawback of this system is that the sensor
is connected to the moving components of the crank system, while
5   the control member is attached to the stationary frame, such
that it is relatively complicated to transmit the measurement
signal to the control member. The design with carbon brushes
proposed in the publication takes up space, increases the risk
of noise in the signal and gives rise to contamination.
10   Furthermore, systems which are based on measuring the
tension in the chain, in which the tension force in the chain
acts on a spring-preloaded lever, have been proposed. Therein,
the position of the lever is a measure of the force in the
chain. This system too is fragile, liable to damage, susceptible
15   to wear and contamination and, moreover, cannot be used in
combination with a derailleur system.
         Moreover, all the known systems have the drawback of
reacting only to the driving torque generated in the drive line.
This has two main drawbacks. Firstly, these systems are unable
20   to measure the direction in which the force is exerted, and also
can not distinguish between forces which are exerted by the left
leg or the right leg. Secondly, these systems do not react to
the actual force exerted by the rider. After all, if the
direction of the force exerted by the rider runs through the
25   axis of rotation of the crank system, for example if a pedal is
situated in the vicinity of its uppermost position, the driving
force will be low or even zero, while the force exerted may be
considerable.
         It is a general object of the present invention to
30   overcome the abovementioned drawbacks.
         More particularly, the present invention aims to provide
a relatively simple sensor for measuring a pedalling force
exerted by a cyclist.
         It is a particular object of the present invention to
35   provide a sensor which is able to measure both the pedalling
speed and the pedalling force.
         It is a common feature of all the known sensor systems
described above that they are based on carrying out a
measurement on one or more moving components in the drive line.

The present invention is based on the insight that it is not necessary to carry out the measurement at one of the moving components.

5   The present invention is based on the insight that the force exerted on the pedals by a cyclist leads to a tension prevailing in the chain and that this tension leads to reactive forces in the stationary components of a bicycle, and that these reactive forces then lead to deformations of the frame or to deformation of one or more components which are securely

10   attached to the said frame.

       Therefore, based on this insight, the present invention proposes that deformations of this nature be measured, in order for the chain force or the pedalling force to be derived therefrom.

15   Surprisingly, it has proven possible to generate a reliable measurement signal by measuring the deformation which occurs in the frame as a result of the effort exerted by the rider. A significant advantage of this measuring method proposed by the present invention is that the measurement of the frame

20   deformation can be carried out relatively easily with the aid of relatively simple measuring instruments, while the transmission of the electrical measurement signals to a control unit attached to the frame can be carried out by means of a simple fixed wire connection.

25   Japanese patent publication 1996-268.372 describes a bicycle in which a pedalling force is measured by measuring a deformation of the bicycle frame. However, in this known system at two locations, namely the left-hand and right-hand seat stays, the strain occurring there is measured, and the pedalling

30   force is measured by subtracting the two measured changes in length from one another. However, the measured changes in length occur not only as a result of pedalling force but also, for example, when cornering. To be able to correct for this problem, this known system requires two correction sensors on either side

35   of the horizontal upper frame tube of the bicycle frame. All in all, this known system requires four sensors. This large number of sensors makes this known system relatively expensive.

       It is therefore a particular object of the present invention to use a smaller number of sensors, and preferably

- 6 -

only a single sensor, to generate a deformation signal which in a reliable way is a measure of the effort supplied by the cyclist.

As measurement sensor for measuring the deformation at a specific point of the frame, it is possible to utilize any deformation detectors which are known per se, such as strain gauges, piezo elements, etc.

In principle, deformation will occur in the entire frame when the cyclist is exerting a pedalling force. Therefore, in principle any desired position on the frame is suitable for positioning the sensors. However, the deformation characteristic of a bicycle frame is dependent on a number of factors, such as materials used, dimensions and contours of the tubes, etc, and it is recommended to provide the strongest possible measurement signal by positioning the deformation detectors at a frame position with a relatively great deformation. Moreover, a change in length is less suitable for generating a reliable measurement signal; according to the invention, it is recommended to measure a bending or torsion caused by the pedalling force. A position which tests have shown to be suitable is the lower frame tube, where on the one hand there is relatively great deformation while on the other hand the distance to a control unit for an auxiliary electric motor will be short.

In an alternative embodiment, the present invention proposes measuring the deformation of the rear axle as a result of the pedalling force exerted thereon.

In another alternative embodiment, the present invention proposes measuring forces in one or more bearings of the rear axle or of the crank.

Depending on the position on the frame, the deformation to be measured will be a bending, a turning or a combination thereof. It will be clear to a person skilled in the art how the deformation detectors used, for example strain gauges, should be arranged at the measurement location so that the deformation detectors respond to the desired extent to deformation caused by bending or turning.

In a second aspect, the present invention relates in general terms to a system for measuring a driving force in a

transmission system, in particular a transmission system of the
type which comprises two transmission wheels which are coupled
to one another by a substantially loop-shaped force-transmitting
member fitting around the said two transmission wheels and which
5   is closed in itself. The said transmission wheels may, for
example, be designed as a pulley or gearwheel. The force-
transmitting member may, for example, be designed as an
optionally toothed belt or strap or cord, or, for example, as a
chain.

10   A system of this type can be used in particular in a
vehicle which is driven by human force, where it may be
desirable to have means for measuring the driving force
prevailing in the transmission system, as a measure of the
effort supplied by the driver. This requirement too relates in
15   particular, but not exclusively, to the field of electrically
assisted vehicles.

        Hereinafter, this aspect of the present invention will
also be explained specifically for the application example of an
electrically assisted bicycle. However, it is expressly pointed
20   out that the invention can also be applied to other fields, for
example in wheelchairs, vehicles which are driven by hand, etc.
In another application, it may be desirable to calculate the
power supplied by the cyclist, for example in a situation such
as that of an exercise bicycle, or for racing cyclists cycling
25   on the road; in both cases, there will be no electric drive
motor. In yet another application, it may be desirable to
automatically control a transmission system of a vehicle, such
as a bicycle, on the basis of the force supplied by the driver:
when this force increases, it is possible to change down
30   automatically.

        In the application example of an electrically assisted
bicycle which is to be discussed below, it is assumed that the
bicycle is driven by means of a bicycle chain which is fitted
around two gearwheels, one of which is mounted on a crank while
35   the other is mounted on the rear wheel. However, the invention
can also be applied to vehicles, including bicycles, in which
the force-transmitting member is designed as a belt, strap,
cord, etc.

As has already been stated above, systems in which the
tension in the chain acts on a spring-preloaded lever have
already been proposed for measuring the chain force. As has been
mentioned, there are drawbacks associated with these systems.

5   The present invention aims to provide a simplified
measuring system in which the chain force is measured with the
aid of a sensor which is fixedly mounted on the bicycle frame or
on a component fixed to the said bicycle frame.

This aspect of the present invention, too, is based on
10   the insight that a tension which prevails in the chain leads to
reactive forces in the stationary components of a bicycle, and
that these reactive forces then lead to deformations of the
frame or to deformation of one or more components which are
securely attached to the said frame.

15   Therefore, based on this insight, the present invention
proposes to measure such deformations in order to derive the
chain force therefrom.

In one embodiment, the present invention proposes to
measure the deformation of the rear axle as a result of the
20   chain force exerted thereon.

In an alternative embodiment, the present invention
proposes measuring forces in one or more bearings of the rear
axle or of the crank.

25   These and other aspects, characteristics and advantages
of the present invention will be explained in more detail by the
following description with reference to the drawing, in which
identical reference numerals denote identical or similar
components, and in which:
30   figure 1A diagrammatically shows a side view of a bicycle;
figure 1B diagrammatically shows a side view of an electrically
assisted bicycle;
figure 2 shows a block diagram of an electric circuit;
figures 3A-B diagrammatically show vertical sections through a
35   bicycle;
figures 4A-E are graphs illustrating measurement results from a
test;
figures 5A-C are also graphs illustrating measurement results of
a test;

figures 6A-B illustrate a bicycle with a separate bottom
bracket;
figure 7 diagrammatically shows a few components of a drive
system of a bicycle;
5   figure 8 shows a diagrammatic plan view of a rear axle of a
bicycle, provided with a hub motor and an instrumented rotary
bearing;
figure 9A diagrammatically shows a cross section through an
instrumented rotary bearing;
10   figure 9B diagrammatically shows an example of a section of the
measurement signal generated by such an instrumented rotary
bearing;
figure 10A diagrammatically shows a cross section, similar to
figure 9A, through a rotary bearing which has been modified in
15   accordance with the present invention;
figure 10B diagrammatically shows an example similar to figure
9B of a section of the measurement signal generated by a
modified rotary bearing of this type;
figure 11 diagrammatically shows a plan view, similar to figure
20   8, of a rear axle of a bicycle, provided with a hub motor and a
bending sensor;
figure 12 diagrammatically shows an example similar to in figure
10B of a section of the measurement signal generated by a
bending sensor of this type.
25

        Figure 1A diagrammatically shows a side view of a
bicycle 1 with a frame 10, which frame 10 comprises an upper
frame tube 11, a lower frame tube 12 and a saddle tube 24, which
are attached to one another in the customary triangular
30   configuration, with the upper frame tube 11 substantially
horizontally oriented. The upper frame tube 11 and the lower
frame tube 12 meet one another at a handlebar tube 14 in which a
handlebar pin 15 is rotatably mounted. At its top end, the
handlebar pin 15 is provided with handlebars 16, while at its
35   bottom end it is attached to a front fork 17 in which a front
wheel 18 is mounted.
        In the saddle tube 13, there is arranged a saddle pin 19
which at its top end bears a saddle 20.

To support a rear wheel 21, the frame 10 comprises a rear fork 22 and a rear frame tube 23. The rear fork 22 extends from a top end of the saddle tube 13 to a hub 24 for the rear wheel 21, and the rear frame tube 23 extends between the hub 24

5   and a bottom end of the saddle tube 13.

The bottom end of the saddle tube 13 and the bottom end of the lower frame tube 12 meet one another at a bottom bracket 25 of the frame 10. The bottom bracket 25 is a cylindrical space, the centre axis of which is substantially horizontally

10   oriented, at right angles to the longitudinal direction of the bicycle 1, and in which a crank (which is not shown in this figure for the sake of simplicity) of a crank system 26 is rotatably mounted. Crank arms which are oriented at right angles to the crank and are provided at their respective ends with

15   pedals 27, only one of which is illustrated in figure 1A, are mounted at the two ends of the crank. Rotation of the crank is transmitted to the rear wheel 21 by means of a chain 28, via gearwheels which are not shown for the sake of simplicity.

Figure 2 is a block diagram which shows a signal-

20   processing unit 40, with an input 41 for connecting thereto a sensor 50, which can provide the signal-processing unit 40 with a signal which is representative of the pedalling force exerted by a rider of the bicycle 1. The signal-processing unit 40 can process such a signal in various ways. For example, it may be of

25   interest for sportsmen to record the pedalling frequency and/or the mean pedalling frequency, the power delivered, efficiency of the pedalling movement, etc, and for this purpose the relevant data can be derived, by a suitable signal-processing operation which is known per se and is carried out by the signal-

30   processing unit 40, from the cyclical signal received at the input 41 and, for example at an output 42, can be provided to a display 43 or the like.

It is also conceivable, as illustrated in figure 1B, that the bicycle 1 is an electric bicycle provided with an

35   electric motor 45 which is powered from a battery 46 and is coupled to the crank system 26 in order to provide an auxiliary force to the crank system 26. The electric motor 45 is under the control of the signal-processing unit 40, which for this purpose, at its control output 44, emits suitable control

signals to the electric motor 45. The signal-processing unit 40
is designed to make the level of the auxiliary force generated
by the electric motor 45 dependent on the level of the pedalling
force exerted on the pedals 27 by the rider. Therefore, the
5   control signal for the electric motor 45 generated by the
signal-processing unit 40 at its control output 44 is dependent,
in a predetermined manner, on the input signal received at its
detection input 41. The signal-processing unit 40 can use an
intelligent control arrangement, in which the control
10 characteristic is adapted to a rider profile on the basis of
pedalling frequency, cycling speed, etc. For this purpose
further sensors may be coupled to the signal-processing unit 40,
if appropriate.

Since signal-processing units for processing such an
15 input signal and actuating an electric motor in a predetermined
manner are known per se, for example in the form of a suitably
programmed microprocessor, the way in which the signal-
processing unit 40 operates will not be explained in more detail
here. It is sufficient to point out that in general the control
20 characteristic is such that, where the conditions remain
otherwise unchanged, the electric motor provides more force as
the force measured increases.

According to the prior art, a sensor 50 is coupled in
one way or another to moving components of the bicycle 1, such
25 as the crank system 26 or the chain 28. However, according to
the present invention the sensor 50 is coupled to the frame 10
for the purpose of measuring the deformation of the frame 10 as
a consequence of the pedalling force exerted by the rider.
Figures 3A and 3B illustrate this measurement principle. Figure
30 3A is a vertical cross section through the frame 10 of the
bicycle 1 in an at-rest position thereof. The point of contact
of the rear wheel 21 on the ground is indicated by the letter R.
For the sake of simplicity, components such as handlebars and
saddle have been omitted from this figure. The bicycle is
35 substantially symmetrical with respect to a centre plane M. The
symmetrical bicycle frame has a neutral line which generally
lies in the plane of the frame and runs from the clamping of the
rear hub to the steering-head tube. A pedalling force exerted on
a pedal 27 is denoted by the letter F_P. The pedalling force F_P of

the cyclist lies outside the said plane and crosses the neutral
line. Consequently, a moment of torsion is generated and the
frame 10 will be deformed with respect to the wheels 18 and 21
resting on the ground, as shown in exaggerated form in figure
3B. More particularly, the frame twists about the neutral line
and the top and bottom frame tubes are subjected to turning. The
level of the deformation is a measure of the pedalling force
exerted by the cyclist.

The extent of deformation will be dependent, inter alia,
on the material used for the frame 10, the shape and dimensions
of the tubes used in the frame 10, etc. The state of deformation
will not be the same in all the tubes. In general, it can be
stated that the deformation of the saddle tube 13 will
substantially be a state of bending, while the deformation in
the bottom frame tube 12 will substantially be a state of
torsion. This deformation of the frame 10 can be measured
successfully and has been found to be a good representation of
the force exerted. Therefore, the present invention proposes
that the bending of the frame 10 be measured with the aid of the
sensor 50 and that the measurement signal obtained in this way
be used as input signal for the signal-processing unit 40.

In principle, a certain amount of deformation will occur
in each component of the frame 10, so that the sensor 50 may in
principle be mounted at any desired position of the frame 10. A
position which has proven particularly suitable in a test
arrangement is the underside of the bottom frame tube 12, in the
vicinity of its bottom end, as illustrated in figures 3A and 3B,
for measuring the turning which occurs in the bottom frame tube
12. Moreover, this position can be successfully combined with a
positioning of a signal-processing unit 40 close to the motor
45. Another position which offers practical advantages is a
position in the vicinity of the top end of the bottom frame tube
12: in this case, it is possible to mount a switch on the frame
tube for the purpose of switching the electrical assistance
system on and off and to mount the sensor 50 beneath this
switch, so that the switch protects the sensor from damage.

At the bottom end of the bottom frame tube 12,
predominantly turning will take place. A sensor which is to be
placed here will therefore primarily have to be sensitive to

- 13 -

turning of the frame tube. Positioning strain gauges in such a
manner that they are predominantly sensitive to turning is a
generally known technique and will not be explained in further
detail.

5   At the bottom end of the saddle tube 13, predominantly
bending will take place. A sensor which is to be positioned here
will therefore have to be predominantly sensitive to bending of
the frame tube. Positioning strain gauges in such a manner that
they are predominantly sensitive to bending is a generally known

10   technique and will not be explained in further detail.
          However, it is noted that deformation will also occur in
other sections of the frame 10, and the same applies to
components which are securely connected to the frame 10, such as
for example the handlebar pin 15 and the saddle pin 19. The

15   reactive force exerted on the handlbars 16 by the cyclist will
predominantly be directed horizontally forwards, so that
primarily bending will occur in the handlebar pin 15. The
reactive force exerted on the saddle 20 by the cyclist will
predominantly be directed horizontally backwards, so that

20   predominantly bending will likewise occur in the saddle pin 19.

          In a design variant, it is possible for the sensor 50
and the signal-processing unit 40 to be integrated on a single
chip. Furthermore, it is then possible that other functions,

25   such as an identification number of the bicycle, are integrated
in such a chip.
          In another design variant, the sensor 50 is designed as
a sticker with integrated strain gauges. Such a sticker is
particularly easy to attach to the frame of a bicycle.

30   An important advantage that is thus achieved according
to the present invention is that the sensor 50 creates a
measurement signal even if the direction of the pedalling force
F_p intersects the axis of rotation of the crank system 25, for
example when a pedal 27 is in its highest position, so that the

35   rider can still gain auxiliary force from the electric motor 45.
In the known electrically assisted bicycles this is not the
case, or is the case to a much lesser extent, since the driving
force in the drive line is highly dependent on the position of
the pedals, and consequently it can happen that the desired

- 14 -

support remains absent even when the pedalling force is high. By contrast, according to the present invention, the sensor signal is to a large degree proportional to the force exerted by the rider, irrespective of the position of the pedals, so that it is

5 therefore always possible to offer more auxiliary electrical force when the rider, for whatever reason and under whatever conditions, exerts more force.

The sensor 50 may be of any suitable type which is suitable for measuring the deformation of a structural

10 component. In a test arrangement, a sensor based on strain gauges has proven very successful, but other types of sensors, such as piezo elements, capacitive sensors, etc, will also satisfy the requirements, as will be clear to a person skilled in the art.

15 Since it will be clear to a person skilled in the art how a sensor 50 comprising one or more strain gauges should be arranged on a component of the frame 10 in order to successfully measure the deformation occurring therein, this will not be explained in more detail here. Nor will the way in which the

20 signals from individual strain gauges in a sensor comprising a plurality of strain gauges can be combined with one another to obtain an optimum measurement signal be explained here, since this is part of general knowledge.

25 Figures 4A-E illustrate that the measurement signal obtained in this way from the measurement sensor 50 is highly representative of the pedalling force exerted by the rider or the torque occurring in the crank system 26. This means that it is possible to calculate the desired data from the received

30 signal, for which purpose the signal-processing unit 40 will be programmed in a suitable manner, as will be clear to a person skilled in the art. Figures 4A-E are obtained from a test ride on a bicycle whose frame 10 had been provided with a strain gauge sensor 50 mounted at the position indicated in figures 3A-

35 B. Furthermore, the bicycle 1 was provided with a very accurate speed sensor. Figures 4A-E relate to a measurement period of 60 seconds; the time is plotted along the horizontal axis in all five figures.

In figure 4A, the measured velocity V, expressed in kilometres per hour, is plotted along the vertical axis, and in figure 4B the acceleration A calculated from the measured velocity V is plotted, expressed in m/s^2. The measurement period

5   begins at time t=0, at which the bicycle is already at a velocity of approximately 10 km/h. This velocity is kept substantially constant for about 22 seconds, after which the rider accelerates to a velocity of approximately 20 km/h, which is reached at time t=35 sec. Further acceleration is commenced

10 at time t=50 sec.

In the graph of figure 4B, it can be seen that for the first 22 seconds the acceleration fluctuates around 0 m/sec^2, and that the same applies between approximately t=38 sec and t=51 sec.

15 The torque T exerted on the crank system can be calculated from the acceleration which has been calculated in this way, taking into account air resistance and friction. This calculated torque T, expressed in Newtonmeters, is illustrated in figure 4E as graph T2.

20 Figure 4C shows the measurement signal which emanates from the sensor 50 and is therefore representative of the stress S occurring in the frame, expressed in arbitrary units, as graph S1. Although it is to be expected that the measurement signal will be symmetrical around 0, in practice, as is shown, this is

25 not necessarily always the case. However, it is possible to correct for this. In the example shown, firstly a mean value <S> is calculated for the measurement signal, integrated over a predetermined period. This mean signal is also shown in figure 4C. The period used to form the mean was in this case 1 minute.

30 By subtracting the mean value <S> calculated in this way from the asymmetrical measurement signal S1, a measurement signal S2 results which is symmetrical and which is shown in figure 4D.

The torque acting on the crank can be calculated from

35 this signal S2 which is symmetrical by filtering the signal S2 in a suitable manner and multiplying it by a suitable amplification factor. The torque calculated in this way is shown in figure 4E as graph T1. It can be seen that the torque T1 as calculated on the basis of the measurement signal obtained from

- 16 -

the sensor 50, on the one hand, and the torque T2 as calculated
from the measured velocity, on the other hand, exhibit a very
good level of correspondence, from which it is concluded that
measuring the stress situation in the frame is a reliable
5   measurement for determining the torque occurring in the crank
system 26.

     With regard to figure 4E, it is also pointed out that
the two graphs T1 and T2 correspond less well for the first 20
seconds, which is caused by the automatic calibration carried
10   out.

     Figures 5A-C show measurement signals which illustrate
the present invention in a different way. A test bicycle was
provided with a sensor 50 according to the present invention,
15   and with a known system which is incorporated in the crank
system and is based on a planetary system. During a test,
measurements were carried out using both sensors simultaneously.
Figure 5A shows a measurement signal S3 which is obtained from
the sensor 50 according to the present invention, expressed in
20   arbitrary units, for a period of 8 sec. Figure 5B shows a
measurement signal S4, obtained over the same period, from the
planetary system. Figure 5C shows the measurement signal S3 from
figure 5A after rectification (S5).

     It can be concluded from figures 5A-C that the sensor 50
25   according to the present invention provides a measurement signal
S3 which contains at least as much information as the
measurement signal S4 provided by the sensor according to the
prior art. However, a significant difference is that the signal
S3 which is obtained from the sensor 50 according to the present
30   invention has both positive and negative signal values with
respect to the zero level, corresponding to an alternating load
on the frame by the right and left pedals.

     Furthermore, it can be seen clearly in figures 5A-C that
the sensor 50 according to the present invention provides a
35   measurement signal S3 which, even after rectification (S5), is
related to the pedalling force exerted on the pedals 27 by the
rider, while the sensor according to the prior art can only
measure the force generated in the drive line. With the
measurement signal S3 according to the present invention, the

force peaks are relatively wide and flat, so that the electrical
force assistance is offered over a wide angular range. By
contrast, with the measurement signal according to the prior art
the force peaks are relatively sharp, so that most electrical
5   assistance is offered at a horizontal position (90°) of the
crank arms and decreases rapidly besides that position.
Particularly at the peaks around t=8.3 sec, t=13 sec and
t=15.8 sec, it can be clearly seen in signals S3 and S5 that the
force peaks are flattened or even have a local minimum in their
10   centre, caused by the fact that at a virtually horizontal
position of the crank arm (90°; 270°), a pedal moves downwards
and the rider is effectively exerting less force on it. When the
pedals are in a more vertical position (approx. 30° and approx.
120°), the pedalling force is higher (S3, S5), but relatively
15   little of this considerable force is converted into forwards
propulsion (S4). According to the present invention, it is at
these very points that more assistance is offered, while the
prior art offers less assistance at these points.

20   Although it is often sufficient to carry out zeroing and
calibration during the production of the bicycle, it may, for
various reasons, be desirable that it is possible to correctly
determine the zero level of the measurement signal, for example
in order to correct if the zero point shifts as a result of
25   external influences. According to the present invention, a
shifting zero point can be corrected for in various ways. By way
of example, it is possible for the signal-processing unit 40 to
be designed to detect when no load is being exerted on the
pedals 27, for example by checking whether the pedalling
30   frequency is zero, if appropriate supplemented by a velocity
measurement with the aid of an additional speedometer. In such a
situation, the pedalling force would have to be zero; therefore,
the measurement signal which is then received is interpreted by
the signal-processing unit 40 as the zero level. An effective
35   measurement signal is then calculated by subtracting the
calculated zero level from the actual measurement signal. When a
calibration of this nature has been carried out, the measurement
signal obtained from the sensor 50 will be intrinsically
symmetrical, while an asymmetrical measurement signal then

indicates an asymmetrical load, i.e. the rider exerts more force
with his one leg than with his other leg. This may in itself be
valuable information, for example when a sportsman is training.

It is also possible to modify the measurement signal,
for example by, as described above, deducting a mean value <S>
from the measurement signal. As a variant, it is possible to
filter the measurement signal using a high-pass filter with a
low crossover frequency of, for example, approximately 0.01 Hz.
After such a modification, the amplitude of the measurement
signal derived from the left leg will be equal to the amplitude
of the measurement signal derived from the right leg, so that
both legs are given equal assistance. This also applies in cases
in which a cyclist has one leg which is significantly weaker
than the other leg, so that in these cases the weak leg is given
more assistance in relative terms than the strong leg by virtue
of the present invention. By contrast, with electrical
assistance according to the prior art, a cyclist of this type
would experience a relatively large amount of assistance to his
strong leg and relatively little assistance to his weak leg.

Therefore, the present invention teaches that the level
of a force or torque exerted on the pedals of a bicycle by a
rider is calculated by a signal-processing device on the basis
of a measurement signal which is obtained from a sensor which is
attached to the frame of the bicycle in order to measure the
deformation which occurs in the frame. The sensor may comprise
one or more strain gauges.

The measurement signal can be processed in various ways
in order to obtain various types of data. For example, it is
possible to derive the pedalling frequency from the measurement
signal. The instantaneous position of the crank arm can be
determined from the phase of the measurement signal, and from
this, in conjunction with the calculated pedalling force, it is
possible to derive the torque generated in the crank system. The
power passed on to the crank system can be derived by a
combination of torque and rotational speed. The calorie
consumption of the cyclist can be estimated from this
information.

It is also possible to obtain information from the
profile of the pedalling force as a function of the position of
the crank arm (measurement signal as a function of the phase).
On the one hand, this can be used to derive the "pedalling

5   efficiency" of the cyclist, and possibly even, by suitable
training, an unfavourable pedalling characteristic might be
improved. Moreover, the pedalling characteristic can be
considered to be an individual physical characteristic,
comparable to a signature, so that it is possible to recognize

10   an individual cyclist by his pedalling pattern and to adapt the
characteristic of electrical assistance accordingly.

         A pedalling characteristic can be defined on the basis
of a number of parameters, such as: mean pedalling speed; mean
pedalling force; force when moving off; relationship between

15   pedalling force at the dead centre positions and at the
horizontal position of the crank arms; duration of pause between
the pedalling movements; etc. All the abovementioned parameters
can be derived in a simple manner from the measurement signal,
as will be clear to a person skilled in the art. It is possible

20   to define cyclist categories in advance and to allocate an
individual cyclist to such a cyclist category as a function of a
measured pedalling characteristic; examples of cyclist
categories of this type include: sporty; steady; long pauses
between pedalling movements; strong/weak; slow pedaller/fast

25   pedaller; etc.
         In a preferred embodiment according to the present
invention, the signal-processing unit 40 is adaptive in the
sense that a control characteristic is adapted to the cyclist
category. In the case of a bicycle with an automatic gear change

30   system, the signal-processing unit 40 may, for example, be
designed, if the cyclist is a slow pedaller, to engage a higher
gear even at relatively low pedalling speeds (for example even
at 50 pedal revolutions per minute) and, if the cyclist is
classified as a sporty cyclist, to engage a higher gear only at

35   relatively high pedalling speeds (for example only at 85 pedal
revolutions per minute). In this context, the absolute value of
the pedalling force plays a less important role. In the case of
a bicycle with electrical assistance to the pedalling force, the
signal-processing unit 40 may, for example, be designed, if the

cyclist pedals irregularly and takes long pauses between
pedalling, to drive the motor for longer after the pedalling
movement has stopped and, if the cyclist is classified as a
sporty cyclist, to set the motor power at a higher level when
5   starting off than for a steady riding profile.

        It will be clear to a person skilled in the art that the
scope of the present invention is not limited to the examples
discussed above, but rather numerous amendments and
10   modifications thereto are possible without departing from the
scope of the invention as defined in the appended claims. For
example, it is possible that a plurality of sensors is used, so
that it is possible to determine the direction of the pedalling
force exerted in three dimensions.
15   Furthermore, the deformation of the frame can be
measured using alternative measuring methods. As is known,
strain gauges are eminently suitable for measuring local
deformation, but for application of the present invention it is
not necessary to accurately measure local deformation. The
20   abovementioned embodiment in which strain gauges are
accommodated in a sticker already measures the mean deformation
in a larger section of the frame. However, it is also possible
to form a mean of the deformation over a larger part of the
frame, for example a greater length of a frame tube. For this
25   purpose, it is possible, for example, to measure the bending of
a frame tube over a large part of its length by means of optical
or mechanical sensors. These sensors may be arranged in the
interior of the frame tube.
        In the above, the present invention has been explained
30   for the case of a standard bicycle in which the crank is mounted
in a horizontal, tubular bottom bracket 25 which forms part of
the frame 10. However, it is also possible that the crank is
mounted in a separate bottom bracket which does not form part of
the frame and is securely attached to the frame, for example by
35   means of screws. Figure 6A shows a side view, similar to figure
1, of a bicycle 101 which is provided with such a frame 110,
while figure 6B is a diagrammatic, perspective view on a larger
scale of a box-like bottom bracket 125. The crank mounted in the
bottom bracket 125 is denoted by the number 129. This bottom

bracket 125 is provided with a plurality of sensors S1 to S4, positioned so as to measure the deformation occurring in the bottom bracket 125 as a result of the pedalling force. In the case shown, the sensors are arranged on the side walls of the

5   bottom bracket 125, aligned in the vertical and horizontal direction, respectively, with the crank 129. The electric motor 45 is also accommodated in the bottom bracket 125, but this is not shown for the sake of simplicity. Furthermore, the signal-processing device 40 is preferably also accommodated in the

10   bottom bracket 125, which is likewise not shown.

One advantage of such a box-like bottom bracket 125 is that it is then easily possible to adapt a bicycle which is not provided with electric pedalling assistance, by replacing the "old" bottom bracket with a bottom bracket of figure 6B, with

15   integrated motor drive 45, signal-processing device 40 and sensors S1/S4.

Figure 7 diagrammatically shows some components of the drive system of a bicycle. A bicycle has a frame 10, in which a

20   rear wheel 21 is mounted and is driven by means of pedals 27 by a chain 28. On one side, the chain 28 is in engagement with a gear wheel which is mounted on a tubular hub 24 of the rear wheel 21, which is mounted on a rear axle 6. The chain 28 is also in engagement with a sprocket 2, which is mounted on a

25   crank 60 and is rotated by means of the pedals 27. The pedalling force exerted on a pedal 27 by a cyclist is denoted in figure 7 as Fp and is predominantly vertically oriented; the tension prevailing in the chain 28 is denoted as Fk and is predominantly horizontally oriented. This chain force Fk has the tendency to

30   pull the rear axle 6 and the crank 60 towards one another, which is prevented by the frame 10, so that the frame 10 exerts a force Flr on the rear axle 6 while the frame 10 exerts a force Flta on the crank 60. The frictional force between rear wheel 21 and roadway is denoted by Fw in figure 7.

35   In the case of an electrically assisted bicycle, there are various positions where the electric drive motor may be arranged and can act on the drive components of the bicycle. In this context, the most significant variants are:
                  - engaging on the rear axle;

- engaging on the crank;

- engaging on the chain;

- engaging on the front wheel;

- engaging on the rear wheel.

5   In the following, the present invention will be explained in
more detail on the basis of an example with a motor which
engages on the rear axle. It may be clear that this description
should not be understood as a limitation of the invention to
electrically assisted bicycles with a motor which acts on the

10 rear axle; on the contrary, the principles described below are
equally applicable, mutatis mutandis, to electrically assisted
bicycles with a motor which engages on the crank, or the chain,
or the front wheel, or the rear wheel, etc.

        Figure 8 shows a diagrammatic plan view of the rear axle

15 6 of a bicycle, for the situation that an electric motor 45 is
associated with the rear axle; in the following, this motor will
be referred to as hub motor. The ends of the rear axle 6 are
fixed to the frame 10 of the bicycle by means of nuts 9. The
tubular hub 24 is rotatably mounted on the rear axle 6 by means

20 of two rotary bearings 7R and 7L. The gearwheel 5, which is
driven by the said chain 28, is mounted at one end of the hub
24, generally the right-hand end. Spokes are diagrammatically
indicated in figure 8 by 8.

        Furthermore, the hub motor 45, which is only

25 diagrammatically indicated, is disposed inside the tube 24.
Electric hub motors are known per se, and consequently their
design does not have to be shown and explained in detailed form
here. It is sufficient to point out that the hub motor 45 has a
first output 45A fixed to the rear axle 6, and a second output

30 45B fixed to the hub 24, which outputs 45A and 45B can be driven
so as to rotate with respect to one another. For this purpose,
the hub motor 45 needs an electrical energy source, such as a
battery, which will be mounted at a suitable position on the
frame 10 of the bicycle and which will be connected, by means of

35 electrical conductors which are fixed with respect to the frame
10 and with respect to the rear axle 6, to the hub motor 45, all
this as is known per se and not shown in the figure for the sake
of simplicity.

When the hub motor 45 is activated, it supplies a
propulsive force to the hub 24, for the purpose of propelling
the wheel 21 with respect to the frame 10 and thus propelling
the bicycle with respect to the road on which it is riding. In
5   principle, the propulsive force (or propulsive moment) supplied
by the hub motor 45 could supply 100% of the propulsive force of
the bicycle, and could be selected and actuated by the rider, so
that the hub motor 45 acts as an ordinary drive motor and the
bicycle acts as an electric moped. However, the present
10   invention specifically relates to an electrically assisted
bicycle, which means that the propulsive force (or propulsive
moment) supplied by the hub motor 45 serves only to assist the
cyclist when cycling by partly providing the pedalling force
required for cycling. This means that the cyclist himself also
15   has to pedal and supply pedalling force; the hub motor 45 then
supplies a propulsive force which is proportional to the force
supplied by the cyclist. If the cyclist does not move the pedals
or rotates the pedals without applying force, the hub motor 45
does not supply any propulsive force. The extent of assistance
20   offered by the hub motor 45 can be adjustable; the hub motor 45
is generally set in such a manner that it supplies approximately
the same amount of propulsive force as the pedalling force from
the cyclist, at least at relatively low speeds. At relatively
high speeds, the contribution decreases progressively.
25   Electrically assisted bicycles of this nature are known per se.
        Therefore, the hub motor 45 of an electrically assisted
bicycle is activated under control of a control member 40, for
example a suitably programmed microprocessor or the like, which
is mounted on a fixed component of the bicycle, which fixed
30   component is advantageously the rear axle 6 itself, as outlined
in figure 8. It will be clear that for embodiments with a crank
motor, the control member will preferably be mounted on a bottom
bracket.
        This control member 40 is designed to activate the
35   electric motor on the basis of the chain force Fk and a desired,
preprogrammed assistance characteristic.
        This assistance characteristic may contain a speed-
dependent component. One example of an assistance characteristic
with a speed-dependent component is:

- 24 -

a) at speeds of lower than 22 km/h, the propulsive
torque supplied by the electric motor is 50% of the propulsive
torque supplied by the cyclist;

b) at speeds of higher than 25 km/h, the propulsive
5   torque supplied by the electric motor is zero;

c) at speeds of between 22 km/h and 25 km/h, the
propulsive torque supplied by the electric motor decreases
linearly from 50% to zero.

All this can be adapted in order to comply with
10   applicable statutory provisions.

In order to be able to actuate the hub motor 45 in the
desired way depending on the force supplied by the cyclist and,
preferably, also depending on the bicycle speed, the control
member 40 should receive signals which are representative of the
15   said parameters. Various sensors are known in the prior art for
supplying such measurement signals, the action of which known
sensors is based on measuring on at least one component which
moves with respect to the frame. The present invention proposes
an improvement by using a sensor whose action is based on
20   measuring on a component which is fixed with respect to the
frame. More particularly, the present invention proposes using a
sensor which can measure a deformation caused by the driving
force (chain force) in such a fixed component.

Two exemplary embodiments will be dealt with in more
25   detail in the following. A first example relates to deformation
in a stationary bearing component. A second example relates to
bending of a stationary axle.

When the cyclist exerts a pedalling force Fp and a chain
30   force Fk prevails in the chain 28, as a result a force Fk is
exerted on the circumference of the gearwheel 5. The direction
of this chain force Fk coincides with the direction of the top
part of the chain 28 at the location of the gearwheel 5, which
is generally substantially horizontal. This chain force Fk is
35   supported on the frame 10 via the hub 24, the bearings 7R and 7L
and the axle 6, respectively. Consequently, a force which is
substantially horizontally oriented and with respect to the rear
axle 6 is substantially radially oriented and the level of which
is proportional to the chain force Fk, prevails in the bearings

7R and 7L. It should be clear that the level of the force in the bearings is dependent on their distance from the gearwheel 5; in the example illustrated, the force in the right-hand bearing 7R will be greater than in the left-hand bearing 7L.

Also, the chain force Fk exerts a substantially horizontally oriented force Fk on the circumference of the sprocket 2, which force is supported, via the crank 60 and the crank bearings diagrammatically indicated by 62, respectively, on a bottom bracket 61 which is fixed to the frame 10, so that then a force which is substantially horizontally oriented and is substantially radially oriented with respect to the crank 60, and the level of which is proportional to the chain force Fk, prevails in the crank bearings 62.

In a first exemplary embodiment proposed by the present invention, the forces occurring in at least one of the said bearings are measured. If a bicycle has a rear axle which is provided with a hub motor, it is most expedient to use one of the rear-axle bearings 7 for this purpose, in which case the right-hand bearing 7R is generally able to a give a stronger signal. In the design variant illustrated in figure 8, the right-hand bearing 7R is provided with an integrated deformation sensor, as will be explained more extensively below, which sensor provides a measurement signal S1 to the control member 40. As an alternative, the left-hand bearing 7L may be provided with an integrated deformation sensor, or both the right-hand bearing 7R and the left-hand bearing 7L may be provided with an integrated deformation sensor. Rotary bearings provided with integrated internal sensors, also referred to below as instrumented rotary bearings, are already known in the prior art and are commercially available as a standard product. By way of example, reference is made in this context to American patent 4.203.319.

Figure 9A diagrammatically shows a cross section through an instrumented rotary bearing 70, and figure 9B diagrammatically shows an example of a section of the measurement signal S1 generated by such an instrumented rotary bearing 70. Such a rotary bearing 70 has an inner race 71, an outer race 72 and balls or rolls 73 arranged between them. Furthermore, the bearing 70 is provided with a deformation

sensor 74, for example based on strain gauges, which detects a deformation in a bearing race as a result of the balls/rolls moving past. This sensor may be arranged in or on the inner race 71, as indicated in figure 9A as 74A, or in or on the outer race

5   74, as indicated in figure 9A as 74B. In the following, both variants will be referred to without distinction as deformation sensor 74.

During use, the inner race 71 and the outer race 72 will rotate with respect to one another, during which process the

10   balls/rolls 73 will roll along the outer surface of the inner race 71 and along the inner surface of the outer race 72. In the process, the force-transmitting balls/rolls 73 will move past the deformation sensor 74 so that a deformation caused by the balls/rolls 73 at the location of the deformation sensor 74 will

15   fluctuate and the deformation sensor 74 will generate an AC signal S1 (Figure 9B), the peaks S1T of which correspond to the passing of a ball/roll 73 and the valleys S1B of which correspond to the passing of a space between two balls/rolls 73. The amplitude of this AC signal S1 will be dependent on, and

20   will generally be proportional to, the level of a force which is exerted by the outer race 72 and the inner race 71 on one another in a radial direction which coincides with the sensitivity centre of the sensor 74. This direction will also be referred to below as the sensitivity direction 75 of the bearing

25   70. With the orientation shown in figure 9A, in which the sensor 74 is situated in a vertical plane through the centre of the bearing 70, the sensor 74 is predominantly sensitive to vertical forces and is virtually insensitive to horizontal forces; the sensitivity direction 75 of the bearing 70 is then vertically

30   oriented. When used as a rear axle bearing 7 or crank bearing 62, intended to be able to measure the chain force Fk, the bearing 70 should be mounted in such a manner that the sensitivity direction 75 of the bearing 70 coincides as closely as possible with the direction of the chain force Fk, which will

35   generally be substantially horizontal.

The explanation given above applies in a situation in which the level of the force exerted by the outer race 72 and the inner race 71 on one another in the sensitivity direction 75 of the bearing 70 is constant, at least over a time scale which

lasts considerably longer than the time between two successive
passages of a ball. More particularly, it should be pointed out
that the minimum levels S1B of the AC signal are virtually
independent of the level of the force, and that the maximum

5   levels S1T of the said signal are always dependent on the level
of the force which is to be measured at that specific moment. In
fact, the maximum levels S1T form sample values, i.e.
instantaneous recordings of the force in the bearing 70. In
practice, for use as a sensor for measuring a chain force in a

10   bicycle, this may lead to problems, for two reasons. Firstly,
the sampling frequency, which is defined by ball passages, in a
bicycle drive system is relatively low: for a rear axle bearing,
under normal conditions, it is typically 0-15 Hz, and for a
crank bearing it is typically 0-6 Hz. Secondly, the pedalling

15   force Fk which is to be measured is not constant, but rather
fluctuates with a frequency which is twice as great as the
pedalling frequency, typically in the range from 0-4 Hz. More
particularly, the said frequencies are related to one another in
fixed ways: the sampling frequency determined by ball passages

20   for a crank bearing is typically three times as great as the
pedalling frequency, while for a rear-axle bearing this sampling
frequency is typically five times as great as the pedalling
frequency. Since the sampling frequency is so close to the
fluctuation frequency in the variable to be measured (in this

25   case the chain force Fk), it is particularly difficult to
reliably derive a control signal for the electric motor from
this signal, in such a manner that the electric motor supplies a
force which always smoothly follows the chain force.

        The present invention also offers a solution to this

30   problem, by modifying a standard instrumented bearing in such a
manner that the output signal which is generated is
substantially independent of the rotary position of the bearing
races with respect to one another and is therefore independent
of the exact tangential positions of the balls/rolls. Such a

35   modified bearing 170 is diagrammatically illustrated in figure
10A; herein, components which correspond to components of the
standard bearing illustrated in figure 9A are denoted by
reference numerals which have been increased by 100.

In the bearing 170 illustrated in figure 10A, a
measurement signal S3 (figure 10B) is generated which is not
dependent on the deformation caused by a single ball/roll 173 at
a single location, but rather is dependent on a combination of
5   the deformations caused by a plurality of balls/rolls 173 at a
plurality of locations. For this purpose, the bearing 170 could
have a plurality of sensors arranged next to one another; in the
embodiment illustrated in figure 10A, a deformation sensor 174
is of elongate shape or is in the shape of a segment of a
10   circle, so that the sensor 174 is sensitive to the deformation
in a zone of the bearing 170 with a relatively large angular
dimension, specifically in such a manner that this zone always
corresponds to at least two balls/rolls 173. The angular
dimension of this zone preferably corresponds to an integer
15   multiple of the angular distance between successive balls/rolls
173, so that the number of balls/rolls 173 which corresponds to
the deformation sensor 174 is always constant. In the example
illustrated, this number is equal to two, but it may also be
larger or smaller.
20   If the said number is equal to one, this already offers
the advantage that the considerable oscillations in the signal
value are reduced. If the said number is greater than one, the
measurement signal S3 can now be considered at any moment as a
mean of the deformation contributions from two or more
25   balls/rolls 173, in which case the measurement signal S3 may
have a virtually constant value which is only still dependent on
the force in the bearing 170, and no longer on the accidental
orientation of the balls/rolls 173 with respect to the sensor
174. If the force in the bearing 170 varies, for example as a
30   result of variations in pedalling force during a pedal
revolution, the value of the measurement signal S3 at any given
moment is at least approximately proportional to the
instantaneous pedalling force.
Since the sensor 174 now has a relatively large angular
35   dimension, the sensor 174 is now also sensitive to forces whose
direction may exhibit a relatively great distribution. The
principal sensitivity direction 175 of the bearing 170
corresponds to a radial plane through the centre of the sensor
174; for force components which are perpendicular to the

principal sensitivity direction 175, the sensitivity of the
bearing 170 is much less or even zero. In this context, it is
recommended for the angular dimension of the sensor 174 to be no
greater than 90°.

In the situation in which the rotary bearing 70; 170 is
used for bearing the rear axle 6, for example because the drive
motor is situated in the wheel hub 24 of the rear wheel 21, the
inner race 71 is stationary with respect to the bicycle frame
10; in this case, it is practical to use an instrumented rotary
bearing 70; 170 of which the inner race 71 is provided with a
deformation sensor 74A. In the situation in which the rotary
bearing 70; 170 is used for bearing the crank 60, for example
because the drive motor acts on the crank, the outer race 72 is
stationary with respect to the bicycle frame 10; in this case,
it is practical to use an instrumented bearing 70; 170 of which
the outer race 72 is provided with a sensor 74B.

In an exemplary embodiment in which the bicycle is
provided with such an instrumented rotary bearing 70; 170 for
the rear axle or for the crank and in which the said control
member 40 receives the said measurement signal S1; S3, the
control member 40 is designed to calculate the chain force Fk on
the basis of the peak value S1T of the AC signal S1 and/or on
the basis of the amplitude |S1T-S1B| of the AC signal S1
(sampled), or on the basis of the instantaneous signal level of
the measurement signal S3, respectively, taking into account
bicycle-specific conversion factors, as will be clear to a
person skilled in the art. Furthermore, the control member 40 is
designed to activate the electric motor on the basis of the
chain force Fk calculated in this way.

To implement a speed-dependent characteristic, the
control member 40 has to have information relating to the
bicycle speed, which, apart from a known conversion factor, is
equivalent to the rotary speed of the rear wheel 21 and
therefore the hub 24 with respect to the rear axle 6. If the
said first rotary bearing 70 is used for bearing the rear axle
6, such speed information can be derived from the AC signal S1
generated thereby, specifically in the form of the frequency of

this AC signal S1. This advantage can also be offered for the said second rotary bearing 170 if it is provided with a deformation sensor 176 which is sensitive to a single ball/roll 173, as is also shown in figure 10A. This deformation sensor 176

5   applies a measurement signal S4 which may be equal to the signal S1 which has already been discussed and which therefore contains velocity information.

Therefore, in this first exemplary embodiment, the control member 40 may be designed to calculate the bicycle speed

10   on the basis of the frequency of the AC signal S1, S4, taking into account bicycle-specific conversion factors, such as, inter alia, the number of balls/rolls 73 per bearing and the circumference of the rear wheel 21, as will be clear to a person skilled in the art.

15   In a variant, the same result can be achieved in a more direct way without actually calculating the chain force Fk and the bicycle speed as an interim result, as will be clear to a person skilled in the art.

20   The principles of the above explanation also apply to the situation in which the instrumented rotary bearing 70 is mounted at the crank 60. In this case, it is also possible to use the frequency of the AC signal S1, S4 to calculate the bicycle speed, that is if the pedals are being rotated, taking

25   into account the transmission ratio between the crank and the rear wheel.

When the cyclist exerts a pedalling force Fp and a chain force Fk prevails in the chain 28, as a result, as has already

30   been stated, a substantially horizontally oriented force is exerted on the circumference of the gearwheel 5, which force is supported on the frame 10 via the hub 24, the bearings 7R and 7L and the axle 6, respectively. Therefore, a bending moment, which will cause bending of the rear axle 6, then prevails in the rear

35   axle 6, in which case the neutral line of the rear axle 6 will lie in a plane which is substantially horizontally oriented. The level of this bending moment, and therefore the level of the bending which occurs in the rear axle 6, is substantially directly proportional to the instantaneous chain force Fk.

In a second exemplary embodiment proposed by the present
invention, this bending is measured. In the exemplary embodiment
shown in figure 11, the rear axle 6 is provided with a bending
sensor 50 which provides a measurement signal S2 (figure 12) to
5   the control member 40, which measurement signal S2 is
representative of the bending occurring in the axle 6 and
preferably exhibits a linear dependency on the said bending.
This bending sensor 50 is in this case arranged in such a manner
that it is substantially only sensitive to bending in the
10   horizontal direction. The design of such a bending sensor 50 may
be a design which is known per se, based on one or more strain
gauges, as will be clear to a person skilled in the art. The
bending sensor 50 may be mounted on that side of the rear axle 6
which becomes longer as a result of the bending or on that side
15   of the rear axle 6 which becomes shorter as a result of the
bending.

        In this second exemplary embodiment, in which the rear
axle 6 is provided with such a bending sensor 50 and in which
the said control member 40 receives the said measurement signal
20   S2, the control member 40 is designed to calculate the
instantaneous chain force Fk on the basis of the instantaneous
value of the said measurement signal S2, taking into account
bicycle-specific conversion factors, as will be clear to a
person skilled in the art. Furthermore, the control member 40 is
25   designed to activate the hub motor 45 on the basis of the chain
force Fk which has been calculated in this way and a desired,
preprogrammed assistance characteristic, in a similar way to
that described above in connection with the first exemplary
embodiment.
30   Preferably, the bending sensor 50 comprises both a
sensor component which is mounted at the front of the rear axle
6 and a sensor component which is mounted at the back of the
rear axle 6, the signals from which sensor components are
combined. On the one hand, this has the advantage that the
35   measurement signal becomes stronger. On the other hand, this has
the advantage that disruptive influences which are not related
to the horizontal bending are substantially eliminated. In this
context, for example, stresses which are oriented in the
longitudinal direction of the rear axle as a result of the

tightening of nuts 9 which are screwed onto the ends of the rear
axle 6 for attachment to the frame 10 may be mentioned.

5   It is noted that both the measurement signal S1; S3; S4
from the instrumented wheel bearings 7 and the measurement
signal S2 from the bending sensor 50 contain a signal component
which reflects the pedalling frequency, at least if the cyclist
is actually rotating the pedals. The pedalling frequency is
expressed by a periodic fluctuation, with the pedalling
10   frequency, in the level of the chain force Fk. In the case of,
for example, a bending sensor mounted on the rear axle 6, the
measurement signal S2 generated thereby in principle has a DC
value corresponding to the chain force Fk, while the value of
this DC voltage fluctuates with the fluctuations in pedalling
15   force and therefore with a frequency which is twice as great as
the pedalling frequency.
           The control member 40 may be designed to calculate the
bicycle speed on the basis of the pedalling frequency, taking
into account bicycle-specific conversion factors, such as the
20   transmission ratio and the circumference of the rear wheel, as
will be clear to a person skilled in the art.
           Furthermore, the control member 40 may be designed to
activate the electric motor on the basis of the instantaneous
value of the chain force, so that the motor force fluctuates in
25   phase with the pedalling force. However, the control member 40
may also be designed to activate the electric motor on the basis
of a processed value of the chain force, in order to provide for
the user an improved comfort sensation. By way of example, the
activation of the electric motor may be executed on the basis of
30   a mean value of the chain force, so that the motor force is
substantially constant. However, it is also possible, with the
fluctuating chain force, to add up a constant value, so that
although the activation fluctuates in phase with the chain
force, it acquires a more uniform profile; more particularly,
35   therefore, drive will still be provided at the "dead centre
positions" in the pedal movement.

           Normally, a rear axle is designed in such a manner that
it is as rigid as possible. By contrast, a further development

of the inventive idea lies in designing the rear axle 6 in such
a manner that for a specific load it exhibits bending which is
relatively great, at least at the location of the sensor 50. For
this purpose, a rear axle 6 according to the present invention
5   preferably has a sensor-carrying part 51, the deformation of
which, under a specific load, is greater than the deformation of
adjacent axle sections, and the sensor 50 is mounted on the said
sensor-carrying part 51 which is more sensitive to deformation.
The greater sensitivity to deformation can be introduced by
10   providing the sensor-carrying part 51 with an adapted cross
section or by making the sensor-carrying part 51 from an adapted
material, or in other suitable ways. Suitable adapted materials
could be materials with a lower modulus of elasticity.

        The sensor-carrying part 51 preferably has a greater
15   sensitivity to deformation in the horizontal direction with a
sensitivity to deformation in the vertical direction which
remains the same or is even reduced. This may, for example, be
brought about by providing the sensor-carrying part 51 with a
rectangular cross section, in which case the dimension in the
20   horizontal direction is smaller than the dimension in the
vertical direction. The dimension in the horizontal direction
may be smaller than the diameter of adjacent axle sections, and
the dimension in the vertical direction may be greater than the
diameter of adjacent axle sections.
25

        In both the exemplary embodiments described above, the
sensor 74; 174; 50 is substantially only sensitive to
horizontally oriented forces, so that the sensor is virtually
only sensitive to the driving forces. More particularly, the
30   sensor is virtually insensitive to forces which act in the
vertical direction, such as the forces caused by the weight of
the rider, the pedalling force Fp exerted by the cyclist, or
vertical forces which are caused by riding itself, such as when
passing over an uneven road surface or when cornering.
35   The driving by the motor causes a reactive force on the
roadway, which ultimately propels the bicycle. This roadway
reactive force has a horizontal direction and causes a bending
in the rear axle in the same direction as the bending which is
directly caused by the chain force Fk. The influence of this

reinforcing effect can be compensated for in the preprogrammed characteristic of the control member 40.

In the above, the invention has been explained for normal conditions, in which it is tacitly assumed that the

5   vehicle (bicycle) is moving at constant speed on a horizontal roadway. With a more advanced drive, the control member 40 is designed to include factors such as a change in speed and/or a slope angle of the roadway in the actuation of the electric motor.

10   A reduction in speed may be desirable, for example if the cyclist is braking. In that case, he will generally keep the pedals still, so that there is no electrical assistance. Moreover, during braking, the motor can be driven by the bicycle, in order in this way to charge the battery. To this

15   end, the control member 40 may be designed to calculate the instantaneous bicycle velocity V at successive times, to calculate the velocity change dV/dt from this, and, if dV/dt becomes negative, to switch the motor as a brake load.

A reduction in velocity may be undesirable, for example

20   if the cyclist is cycling uphill. In that case, if dV/dt is negative, more intensive assistance is in fact desired. On the other hand, if the cyclist is cycling down hill, the assistance can be reduced, and in these circumstances it is even possible for the motor to be switched as a brake load at a constant

25   velocity.

For this purpose, it is desirable for the control member 40 to have a signal which is indicative of the angle of slope. According to a significant advantage of the present invention, the signals S1 to S4 described above include a component which

30   is indicative of the slope angle. In a further preferred variant of the present invention, the control member 40 is designed to use this signal component for an assistance characteristic as described above.

If the bicycle is on a slope, the sensitivity direction

35   75 (the "horizontal" of the bicycle) forms an angle with the actual horizontal. The force of gravity then has a component in the direction of this sensitivity direction 75, which manifests itself in a shift in the measurement signals. This shift can be

detected, for example by detection of the shift in the mean of
the fluctuating chain force signal.

In both the exemplary embodiments described above, a
5   reliable way is offered for measuring the driving torque and/or
the chain force (Fk) supplied by a cyclist and for actuating a
hub motor 45 on the basis of the pedalling force supplied by the
cyclist. The embodiments consistently offer the significant
advantage that a single sensor (74; 174; 50) is sufficient and
10   that this sensor may be mounted on the same component of the
bicycle as that to which the control member 40 is attached,
namely the rear axle 6 itself or on the inner race 71 fixed to
the rear axle 6, of the wheel bearing 7. A bending sensor 50
mounted on the rear axle measures the bending which occurs in
15   the rear axle itself as a result of the pedalling force. A
pressure sensor 74 mounted in the wheel bearing 7 measures the
forces caused in the wheel bearing by the chain force.

It will be clear to a person skilled in the art that he
20   scope of the present invention is not restricted to the examples
discussed above, but rather various amendments and modifications
thereto are possible without departing from the scope of the
invention as defined in the appended claims. For example, as a
variant, it is possible that the crank instead of the rear axle
25   is provided with an instrumented rotary bearing. Furthermore, as
a variant, it is possible that the driven wheel is the front
wheel of the bicycle.
In the above, the invention has been described for a
vehicle (bicycle) provided with electrical assistance. However,
30   the present invention is also embodied by a modular system which
is suitable for supplying a signal which reflects the chain
force and which can be used for any desired purposes by a
processor or the like. One possible purpose may be to control a
gear system.

- 36 -

CLAIMS

1.   The measurement of the effort made by a person, by
measuring the bending or torsion caused by this effort in a
5   predetermined section of a frame (10) of a vehicle (1) or in a
component which is securely connected to the said frame.

2.   Method for providing a measurement signal which is
representative of the level of an effort made by a rider of a
10   human-powered vehicle (1), on the basis of a bending or torsion
caused by this effort in a predetermined section of a frame (10)
of the vehicle or in a component which is securely connected to
the said frame.

15   3.   Method according to claim 2, wherein the said effort is
a pedal force (F_p).

4.   Method according to claim 2 or 3, wherein the vehicle
(1) is a bicycle, and wherein the said predetermined section of
20   the frame (10) is a bottom end of the bottom frame tube (12) or
a top end of the bottom frame tube (12) or is the top frame tube
(11).

5.   Method according to claim 2 or 3, wherein the vehicle
25   (1) is a bicycle, and wherein the said component securely
connected to the said frame is a saddle pin, or a handlebar pin,
or a bottom bracket, or a front fork, or a wheel axle.

6.   Method according to any one of claims 2-5, wherein a
30   deformation sensor (50) which is attached to the said
predetermined section of the frame (10) or the said component
securely connected to the said frame provides a measurement
signal which is fed to a signal input (41) of a signal-
processing unit (40), and wherein the signal-processing unit
35   (40) calculates the level of the force by processing the signal
received.

7.   Method according to claim 6, wherein the signal-
processing unit (40) calculates a pedal speed from the cyclical

nature of the measurement signal.

8.   Method according to claim 6, wherein, in a state in which the rider is not exerting any force, a zero level is derived from the measurement signal provided by the deformation sensor (50), and wherein an effective measurement signal is calculated by subtracting the calculated zero level from the actual measurement signal.

9.   Method according to claim 6, wherein the measurement signal provided by the deformation sensor (50) is an asymmetrical measurement signal (S1), and wherein a measurement signal (S2) which is symmetrical is derived from the asymmetrical measurement signal by calculating a mean value (<S>) of the asymmetrical measurement signal (S1), and subtracting said mean value from the asymmetrical measurement signal (S1).

10.   Method according to claim 6, wherein the measurement signal provided by the deformation sensor (50) is an asymmetrical measurement signal (S1), and wherein a measurement signal (S2) which is symmetrical is derived from the asymmetrical measurement signal by filtering the asymmetrical measurement signal (S1) using a high-pass filter.

11.   Method according to any one of claims 8-10, wherein the measurement signal (S) which is symmetrical or the effective measurement signal, respectively, is filtered in a suitable way and multiplied by a suitable multiplication factor.

12.   Method for providing a control signal for an auxiliary electric motor (45) of a bicycle (1), wherein the said control signal is determined in accordance with a predetermined characteristic, on the basis of a measurement signal which is representative of the level of a pedal force (F_P) exerted by a rider of the bicycle, and wherein the said measurement signal is provided by means of a method according to any one of claims 2-11.

- 38 -

13.   System for measuring the level of an effort exerted by a
rider of a human-powered vehicle (1), comprising:
a single deformation sensor (50) which is attached, at a
predetermined position, to a frame (10) of the vehicle (1) or to
5   a component which is securely connected to the said frame, which
deformation sensor (50) is designed to generate an electrical
signal which is representative of the bending or torsion which
occurs in the frame at this position;
and a signal-processing unit (40) with an input (41) which is
10   coupled to the deformation sensor (50) for receiving the signal
generated thereby;
the signal-processing unit (40) being designed to process the
received measurement signal in a suitable way and to generate a
signal representative of the said effort therefrom.
15

14.   System according to claim 13, wherein said deformation
sensor (50) comprises at least one strain gauge.

15.   System according to claim 14, wherein the sensor is
20   designed as a sticker.

16.   System according to claim 13 or 14, wherein the said
deformation sensor (50) and the said signal-processing unit (40)
are integrated on a single chip.
25

17.   System according to any one of claims 13-16, wherein a
display (43) for displaying information derived from the
received measurement signal by the signal-processing unit (40)
is associated with the signal-processing unit (40).
30

18.   System according to any one of claims 13-16, wherein the
signal-processing unit (40) is programmed to carry out a method
according to any one of claims 2-12.

35   19.   Bicycle, comprising:
a frame (10);
wheels (18, 21) which are rotatably mounted on the said frame;

a crank system (26) which is coupled to at least one of the said
wheels and having pedals (27) on which a rider can exert a force
(F_P);
a single deformation sensor (50) which, at a predetermined
5   position, is attached to the frame (10) of the bicycle (1) or to
a component which is securely connected to the said frame, which
deformation sensor (50) is designed to generate an electrical
signal which is representative of the bending or torsion in the
frame (10) at this position;
10   and a signal-processing unit (40) which is attached at a
suitable location with respect to the frame (10) and having an
input (41) which is coupled to the deformation sensor (50) for
receiving the signal generated thereby;
the signal-processing unit (40) being designed to process the
15   received measurement signal in a suitable way and, from this
processing, to generate a signal which is representative of the
level of an effort made by the rider.

20.   Bicycle according to claim 19, wherein the signal-
20   processing unit (40) is designed to generate from the received
measurement signal a signal which is representative of the level
of the force (F_P) exerted by the rider.

21.   Bicycle according to claim 19 or 20, wherein said
25   deformation sensor (50) comprises at least one strain gauge, and
wherein the sensor is preferably designed as a sticker.

22.   Bicycle according to claim 19 or 20, wherein said
deformation sensor (50) and the said signal-processing unit (40)
30   are integrated on a single chip.

23.   Bicycle according to any one of claims 19-22, wherein
said deformation sensor (50) is a sensor sensitive to turning
which is arranged at the bottom end of the bottom frame tube
35   (12).

24.   Bicycle according to any one of claims 19-22, wherein
said deformation sensor (50) is a sensor sensitive to bending
which is arranged on the saddle tube (13) or on the back axle.

25.   Bicycle according to any one of claims 19-24, further
provided with an auxiliary motor (45) coupled to the crank
system (26) which is designed to exert an auxiliary propulsive
force on the crank system (26) under the control of the signal-
5   processing unit (40);
and wherein the signal-processing unit (40) is designed to
generate a control signal for the auxiliary motor (45) on the
basis of the measurement signal received from the deformation
sensor (50).
10

26.   Bicycle according to any one of claims 19-24, further
provided with an automatically switching acceleration system
which is designed to bring about a predetermined transmission
ratio in the transmission line between the crank system (26) and
15   a driven wheel under the control of the signal-processing unit
(40);
and wherein the signal-processing unit (40) is designed to
generate a control signal for the automatically switching
acceleration system on the basis of the measurement signal
20   received from the deformation sensor (50).

27.   Bicycle according to claim 25 or 26, wherein the signal-
processing unit (40) is designed to assign a cyclist to
predetermined cyclist categories on the basis of parameters
25   which can be derived from the measurement signal received from
the sensor (50); and wherein the signal-processing unit (40) is
designed to generate a control signal with a predetermined
control characteristic depending on the relevant cyclist
category.
30

28.   Method for measuring a force (Fk) in a substantially
linear transmitting member (28) fitting around two rotating
transmission members (2, 5) of a vehicle driven by human force,
such as a bicycle, comprising the measurement of the bending
35   occurring in a fixed axle (6), in a plane which is substantially
parallel to the said force (Fk).

29.   Method according to claim 28, wherein a transmission
member (5), which is driven by the transmitting member (28), is

mounted on a fixed axle (6), wherein a bending sensor (50) is
mounted on the said fixed axle (6), and wherein the force (Fk)
prevailing in the transmitting member (28) is derived from the
instantaneous value of the measurement signal (S2) generated by
5   the said sensor (50).

30.   Method for measuring a force (Fk) in a substantially
linear transmitting member (28) fitting around two rotating
transmission members (2, 5) of a vehicle driven by human force,
10   such as a bicycle, comprising the measurement of the forces
occurring in a bearing (62; 7) in a plane which is substantially
parallel to the said force (Fk).

31.   Method according to claim 30, wherein at least one of
15   the said transmission members (2, 5) is rotatably mounted by
means of bearings (62; 7) with respect to a frame (10), wherein
at least one of the said bearings (62; 7) is provided with an
integrated sensor (74; 174), and wherin the force (Fk)
prevailing in the transmitting member (28) is derived from the
20   measurement signal (S1; S4) generated by the said sensor (74;
174).

32.   Method according to claim 31, wherein a transmission
member (2) driven by human force which drives the transmitting
25   member (28) is attached to an axle (60) which is mounted by
means of bearings (62) with respect to a frame (10), and wherein
at least one of the said bearings (62; 70; 170) is provided with
an integrated sensor (74; 174).

30   33.   Method according to claim 32, wherein the said axle (60)
is mounted in a housing (61) which is fixed with respect to the
said frame (10), and wherein the said integrated sensor (74B;
174B) is associated with an outer race (72; 172) of said
bearing.
35
34.   Method according to claim 31, wherein a transmission
member (5), which is driven by the transmitting member (28), is
mounted by means of bearings (7) with respect to a frame (10),
at least one of the said bearings (7; 70; 170) being provided

with an integrated sensor (74; 174).

35.   Method according to claim 34, wherein the said
transmission member (5) is mounted on an axle (6) fixed with
respect to the said frame (10), and wherein said integrated
sensor (74A; 174A) is associated with an inner race (71; 171) of
said bearing.

36.   Method according to any one of the preceding claims 28-
35, wherein the transmission members (2, 5) and the transmitting
member (28) form part of a drive system of a vehicle driven by
human force, and wherein the vehicle speed is also derived from
a component of the measurement signal generated by the said
sensor (74; 174).

37.   Method according to any one of the preceding claims 28-
36, wherein the transmission members (2, 5) and the transmitting
member (28) form part of a drive system of a vehicle driven by
human force, and wherein the pedal speed is also derived from a
component of the measurement signal generated by the said sensor
(50; 74; 174).

38.   Method according to any one of the preceding claims 28-
37, wherein the transmitting member (28) is a bicycle chain, and
wherein the driven transmission member (5) is a sprocket
associated with a driven bicycle wheel (21).

39.   Method for actuating a motor (45) and/or a transmission
system of a vehicle driven by human force, such as a bicycle, as
a function of the force (Fk) exerted by a driver, the said force
(Fk) being measured by means of a method according to any one of
the preceding claims, and the activation of the motor (45) or
the transmission system, respectively, being regulated as a
function of the measurement signal provided in this way.

40.   Vehicle which is driven by human force, for example a
bicycle, comprising:
a frame (10);

a driven wheel (21), comprising a wheel hub (24) which, by means
of wheel bearings (12R, 12L), is mounted on an axle (6) which is
fixed to the frame (10), a rotatable transmission member, such
as a sprocket (5), being attached to the said wheel hub (24);
5   a substantially linear, continuous transmitting member (28),
such as a chain, which at least partly fits around the said
transmission member (5);
the said axle (6) being provided with a bending sensor (50)
which generates a measurement signal (S2) which is
10   representative of a bending of the axle (6).

41.   Vehicle according to claim 40, wherein the axle (6) with
the sensor (50) mounted on it is mounted in such a manner with
respect to the frame (10) that the said sensor (50) is sensitive
15   to forces which are directed parallel to the driving force (Fk)
in the transmitting member (28) and is substantially insensitive
to force components which are directed perpendicular thereto.

42.   Vehicle according to claim 41, wherein the axle (6) is
20   provided with a sensor-carrying part (51), of which the bending
strength is lower than the bending strength of adjacent axle
sections, and wherein the sensor (50) is mounted on the said
sensor-carrying part (51) which is more sensitive to
deformation.
25

43.   Vehicle according to claim 42, wherein the sensor-
carrying part (51) has an axle cross section which differs from
that of the said adjacent axle sections, and/or wherein the
sensor-carrying part (51) is made from a material which differs
30   from that of the said adjacent axle sections.

44.   Vehicle according to claim 43, wherein the axle
thickness of the sensor-carrying part (51) is smaller in the
direction of sensitivity than in the direction which lies
35   perpendicular thereto.

45.   Vehicle according to claim 43, wherein the axle
thickness of the sensor-carrying part (51) is smaller in the
direction of sensitivity than the diameter of the said adjacent

- 44 -

axle sections, and wherein the axle thickness of the sensor-carrying part (51) in the direction perpendicular thereto is greater than the diameter of the said adjacent axle sections.

5   46.   Vehicle according to any one of claims 40-45, wherein the wheel (21) is provided with a hub motor (45), the activation of which is controlled by a control member (40) which is preferably mounted on the axle (6) and a signal input of which is connected to the said bending sensor (50) in order to receive
10   the measurement signal (S2) generated thereby; and wherein the control member (40) is designed to control the activation of the hub motor (45) on the basis of the measurement signal (S2) received from said sensor (50).

15   47.   Vehicle which is driven by human force, for example a bicycle, comprising: a frame (10); a wheel (21) which is driven by a substantially linear, continuous transmitting member (28), such as a chain;
20   the transmitting member (28) being driven by a transmission member, such as a sprocket (2), which is mounted on a crank (60), the transmitting member (28) at least partially fitting around the said transmission member (2); the crank (60) being mounted, by means of crank bearings (62),
25   in a bottom bracket (61) fixed to the frame (10); at least one of the said crank bearings (62) being provided with an integrated sensor (74; 174) which generates a measurement signal (S1) which is representative of a force occurring in the crank bearing (62) in question.
30
     48.   Vehicle according to claim 47, wherein the crank bearing (62) with integrated sensor (74; 174) is mounted in such a manner with respect to the frame (10) that the said sensor (74; 174) is sensitive to forces which are directed parallel to the
35   driving force (Fk) in transmitting member (28) and is substantially insensitive to force components directed perpendicular thereto.

49.   Vehicle according to claim 47 or 48, wherein the sensor
(74; 174) is associated with an outer race (72) of the
corresponding crank bearing.

 5   50.   Vehicle according to any one of claims 47-49, wherein
the crank (60) is provided with a crank motor, the activation of
which is controlled by a control member (40) which is fixed with
respect to the bottom bracket and a signal input of which is
connected to the said sensor (74; 174) in order to receive the
10   measurement signal (S1) generated thereby;
and wherein the control member (40) is designed to control the
activation of the crank motor on the basis of the measurement
signal (S1) received from the said sensor (74; 174).

15   51.   Vehicle which is driven by human force, for example a
bicycle, comprising:
a frame (10);
a wheel (21) which is driven by a substantially linear,
continuous transmitting member (28), such as a chain;
20   the wheel (21) comprising a wheel hub (24) which, by means of
wheel bearings (12R, 12L), is mounted on a rear axle (6) fixed
to the frame (10), a transmission member, such as a sprocket
(5), being attached to the said wheel hub (24), the transmitting
member (28) at least partially fitting around the said
25   transmission member (5);
at least one of the said wheel bearings (12R, 12L) being
provided with an integrated sensor (74; 174) which generates a
measurement signal (S1) which is representative of a force
occurring in the wheel bearing in question.
30

52.   Vehicle according to claim 51, wherein the wheel bearing
with integrated sensor (74; 174) is mounted in such a manner
with respect to the frame (10) that the said sensor (74; 174) is
sensitive to forces which are directed parallel to the driving
35   force (Fk) in the transmitting member (28) and is substantially
insensitive to force components directed perpendicular thereto.

53.   Vehicle according to claim 51 or 52, wherein the sensor
(74; 174) is associated with an inner race (71) of the wheel

bearing in question.

54.   Vehicle according to any one of claims 51-53, wherein
the axle (6) is provided with a hub motor (45), the activation
of which is controlled by a control member (40) which is mounted
on the axle (6) and a signal input of which is connected to the
said sensor (74; 174) in order to receive the measurement signal
(S1) generated thereby;
and wherein the control member (40) is designed to control the
activation of the hub motor (45) on the basis of the measurement
signal (S1) received from the said sensor (74; 174).

55.   Vehicle according to claim 46, 50 or 54, wherein the
control member (40) is designed to derive information which is
indicative of the pedalling frequency from the measurement
signal and to control the activation of the motor on the basis
of this information.

56.   Vehicle according to claim 46, 50, 54 or 55, wherein the
control member (40) is designed to derive information which is
indicative of the slope of the vehicle from the measurement
signal and to control the activation of the motor on the basis
of this information.

57.   Rotary bearing (170), comprising:
two bearing races (171, 172) which can rotate with respect to
one another and have balls/rolls or the like (173) arranged
between them;
at least one of the said bearing races (171, 172) being provided
with a deformation sensor (174);
the said deformation sensor (174) being constantly influenced by
at least one of the said balls/rolls or the like (173).

58.   Rotary bearing according to claim 57, wherein the said
deformation sensor (174) is designed to generate a signal which
is representative of a combination of deformations caused by a
plurality of the said balls/rolls or the like (173).

59.   Rotary bearing according to claim 57 or 58, wherein the said deformation sensor (174) has an angular dimension which is such that the said deformation sensor (174) is always influenced by a constant number of the said balls/rolls or the like (173).

60.   Modular system for measuring a driving force in a substantially linear, continuous transmitting member (28), such as a chain of a vehicle which is driven by human force, for example a bicycle, which system is designed to supply an electrical signal which is representative of the said driving force, which electrical signal can be used for a control member (40) of an assisting motor and/or a transmission system of the said vehicle;
the said system comprising:
an axle (6) which is provided with a bending sensor (50), which bending sensor (50) generates a measurement signal (S2) which is representative of a bending of the axle (6);
the axle (6) preferably being provided with a sensor-carrying part (51), the bending strength of which is lower than the bending strength of adjacent axle sections, and the sensor (50) being mounted on the said deformation-sensitive sensor-carrying part (51).

61.   System according to claim 60, wherein a control member (40) for a hub motor (45) is also mounted on the said axle (6), a signal input of which control member (40) is connected to the said bending sensor (50) in order to receive the measurement signal (S2) generated thereby;
and wherein the control member is designed to control the activation of the hub motor (45) on the basis of the measurement signal (S2) received from said sensor (50).

62.   System according to claim 61, wherein a hub (24) is rotatably mounted on said axle (6), and wherein said axle (6) is provided with a hub motor (45), the activation of which is controlled by the said control member (40).

63.   Modular system for measuring a driving force in a substantially linear, continuous transmitting member (28), such

as a chain of a vehicle which is driven by human force, for
example a bicycle, which system is designed to supply an
electrical signal which is representative of the said driving
force, which electrical signal can be used for a control member
5   (40) of an assisting motor and/or a transmission system of the
said vehicle;
the said system comprising:
a crank bearing (62) which is provided with an integrated sensor
(74; 174), which sensor (74; 174) generates a measurement signal
10   (S1) which is representative of a force which occurs in the
crank bearing (62) in question.

     64.   System according to claim 63, also comprising:
     a control member (40), a signal input of which is connected to
15   the said sensor (74; 174) in order to receive the measurement
     signal (S1) generated thereby;
     and a crank motor, the activation of which is controlled by said
     control member (40) on the basis of the measurement signal (S1)
     received from said sensor (74; 174).
20
     65.   Modular system for measuring a driving force in a
     substantially linear, continuous transmitting member (28), such
     as a chain of a vehicle which is driven by human force, for
     example a bicycle, which system is designed to supply an
25   electrical signal which is representative of the said driving
     force, which electrical signal can be used for a control member
     (40) of an assisting motor and/or a transmission system of the
     said vehicle;
     the said system comprising:
30   a wheel bearing (12R) which is provided with an integrated
     sensor (74; 174), which sensor (74; 174) generates a measurement
     signal (S1) which is representative of a force occurring in the
     wheel bearing (12R) in question.

35   66.   System according to claim 65, also comprising a control
     member (40), a signal input of which is connected to the said
     sensor (74; 174) in order to receive the measurement signal (S1)
     generated thereby;

and a hub motor (45), the activation of which is controlled by said control member (40) on the basis of the measurement signal (S2) received from said sensor (74; 174).

5 67.   Vehicle which is driven by human force, for example a bicycle, comprising:
a frame (10);
a wheel (21) which is driven by a substantially linear, continuous transmitting member (28), such as a chain; the
10 transmitting member (28) being driven by a transmission member, such as a sprocket (2), which is mounted on a crank (60), the transmitting member (28) at least partially fitting around the said transmission member (2);
an automatic acceleration system being controlled on the basis
15 of the driving force (Fk) supplied by the driver, by means of a modular system according to claim 60, 63 or 65.
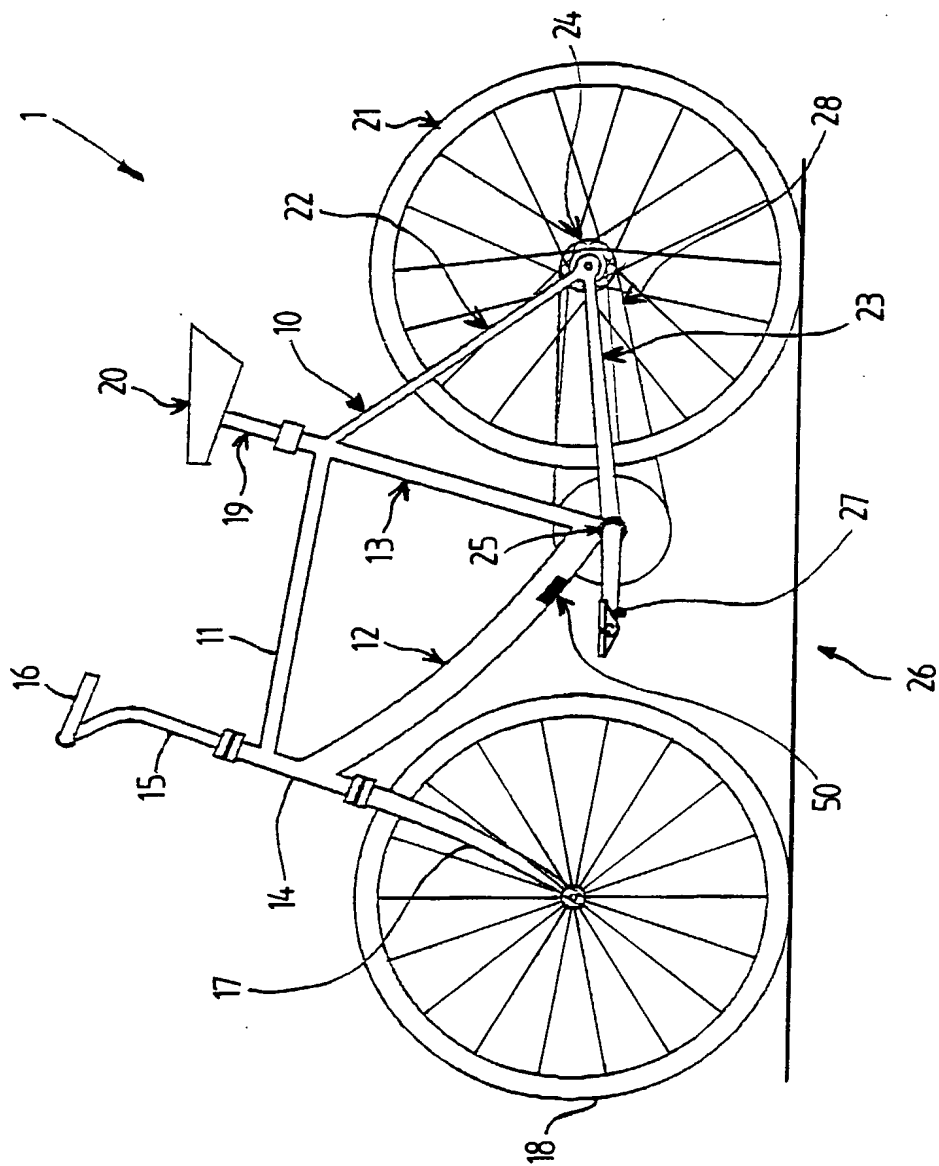
FIG. 1A
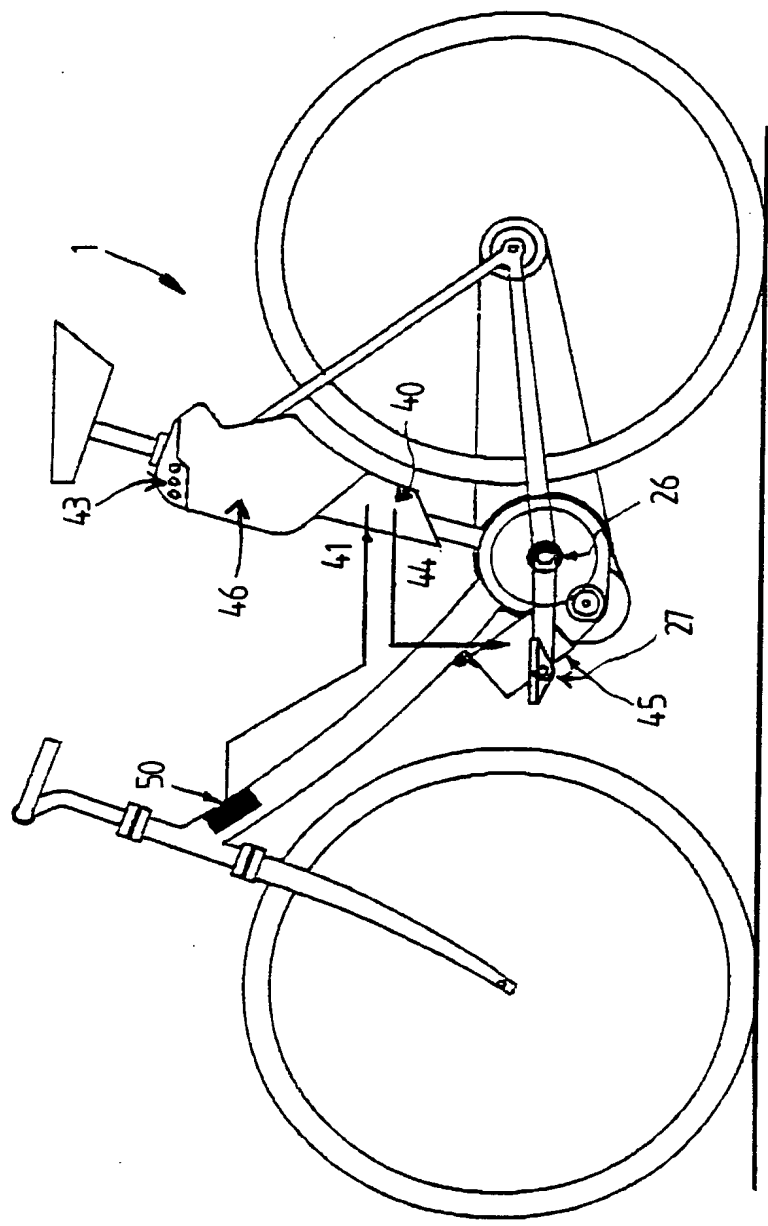
FIG. 1B
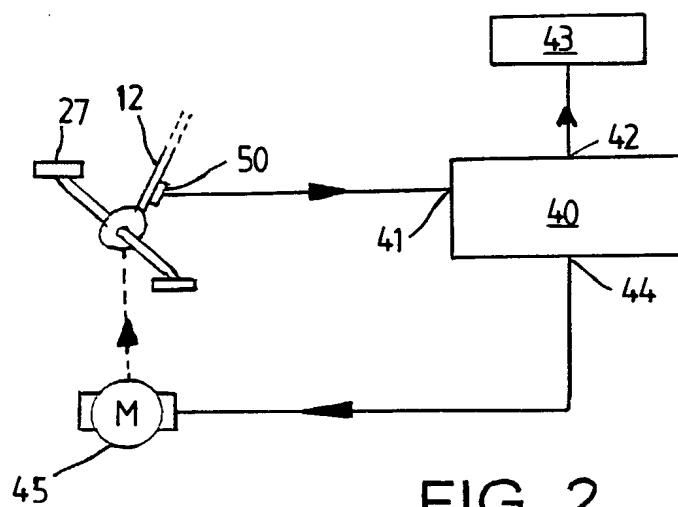
FIG. 2
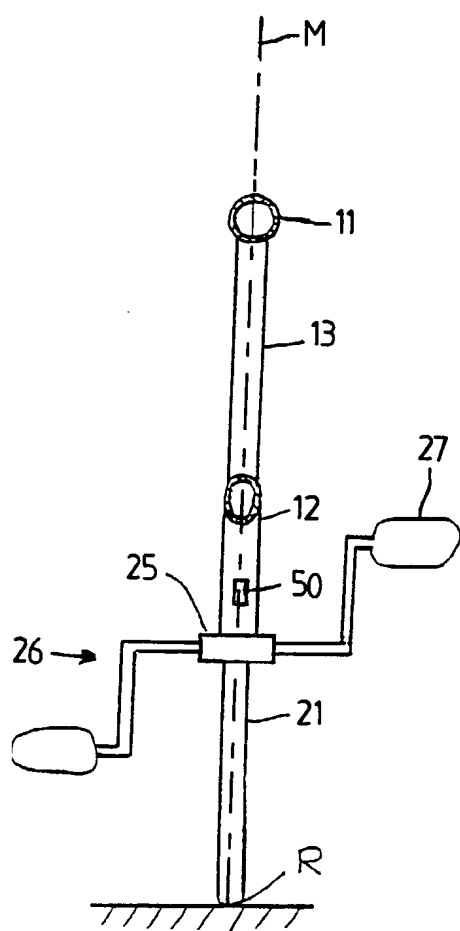
FIG. 3A   FIG. 3B
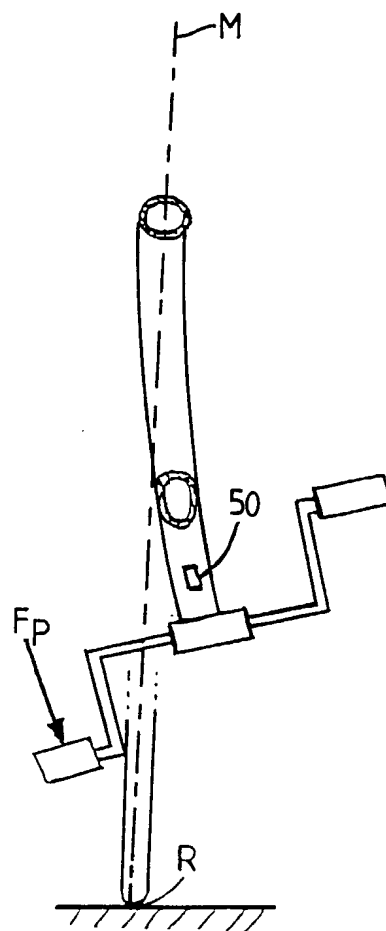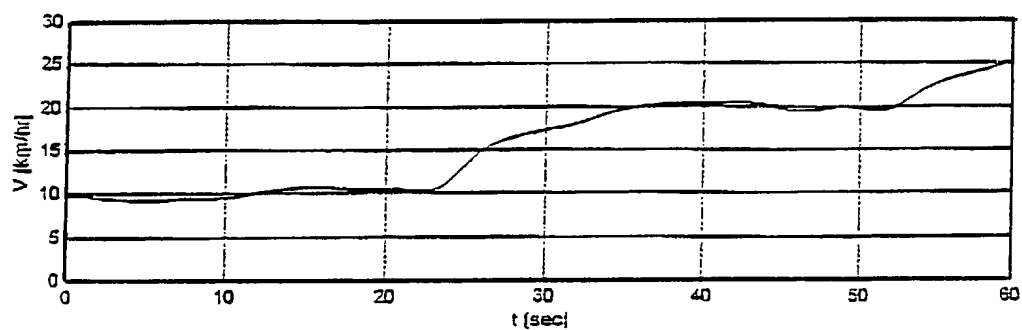
FIG. 4A
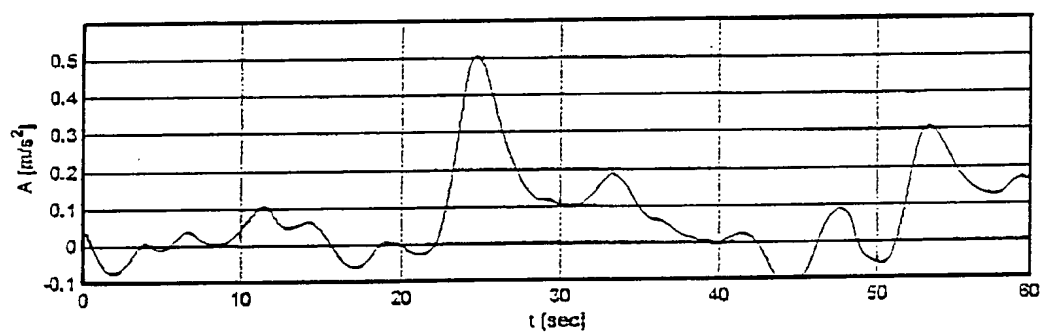
FIG. 4B
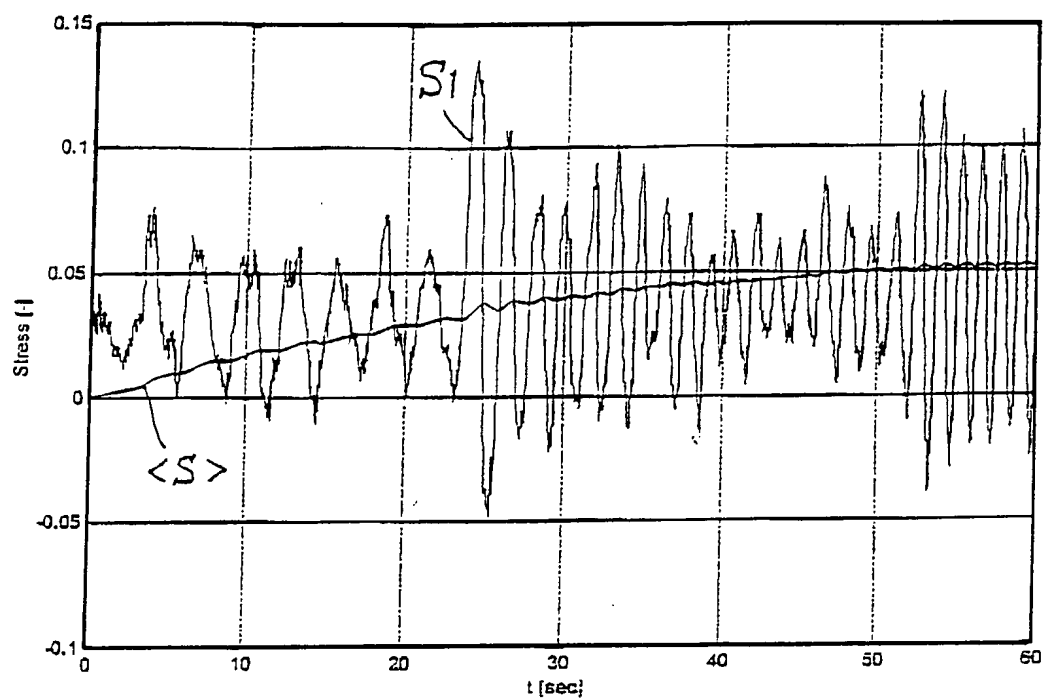
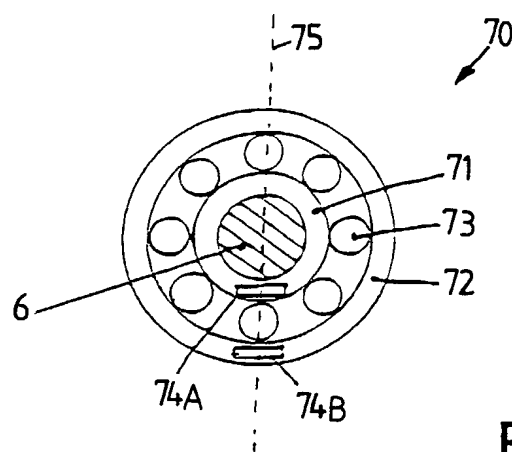**FIG. 4C**
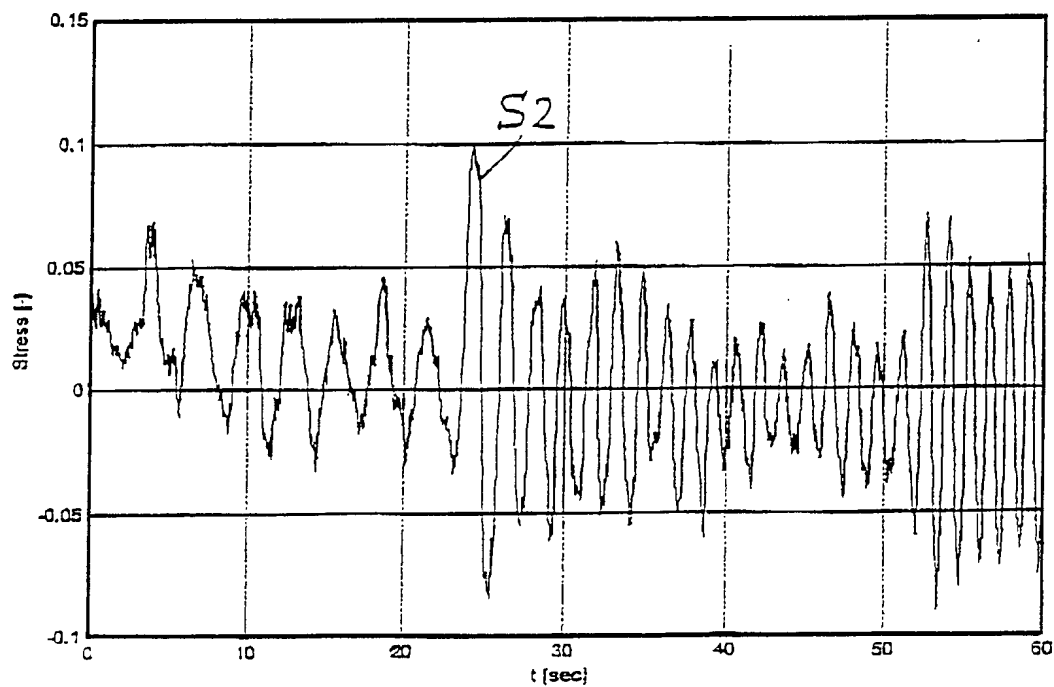
FIG. 4D
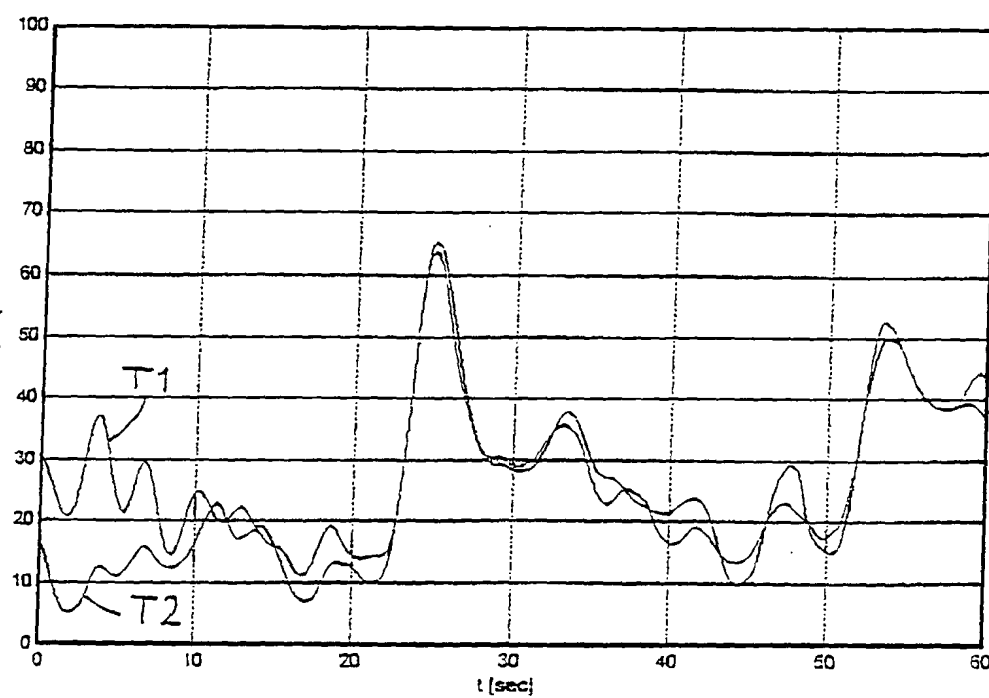
FIG. 4E
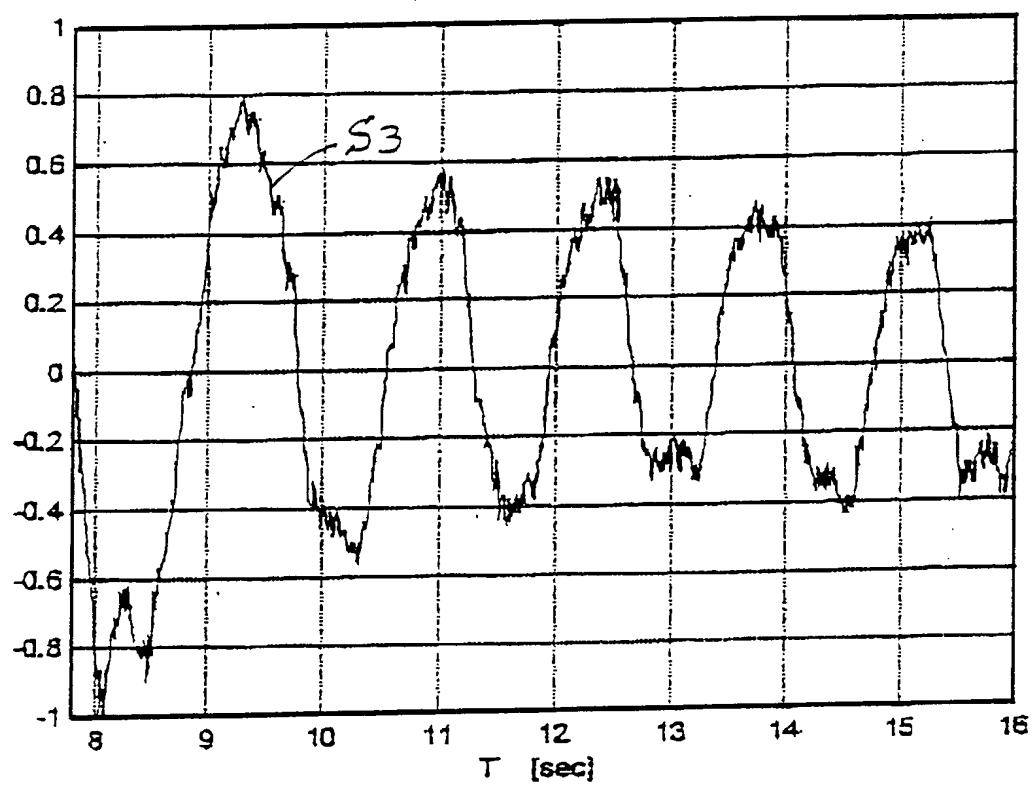
FIG. 5A

FIG. 5B

FIG. 5C

FIG. 6A

FIG. 6B

FIG. 7

FIG. 8
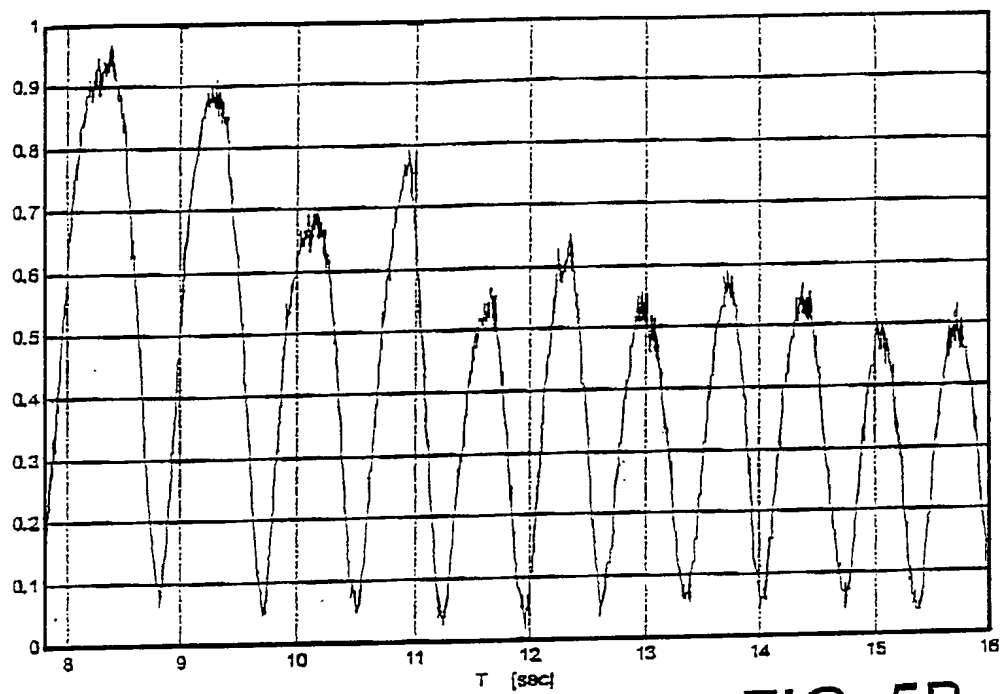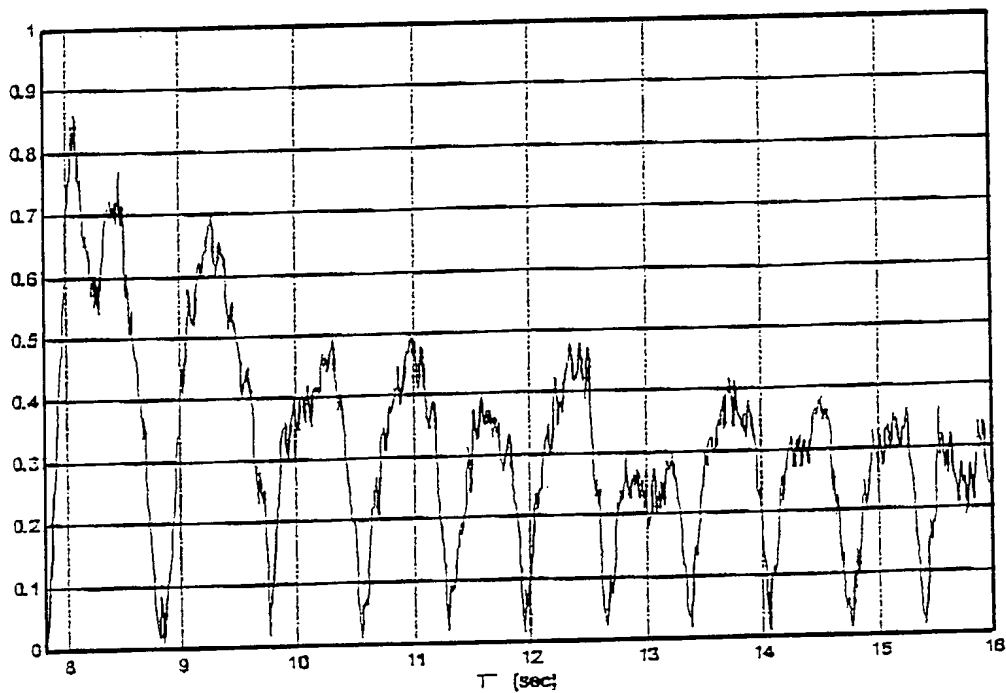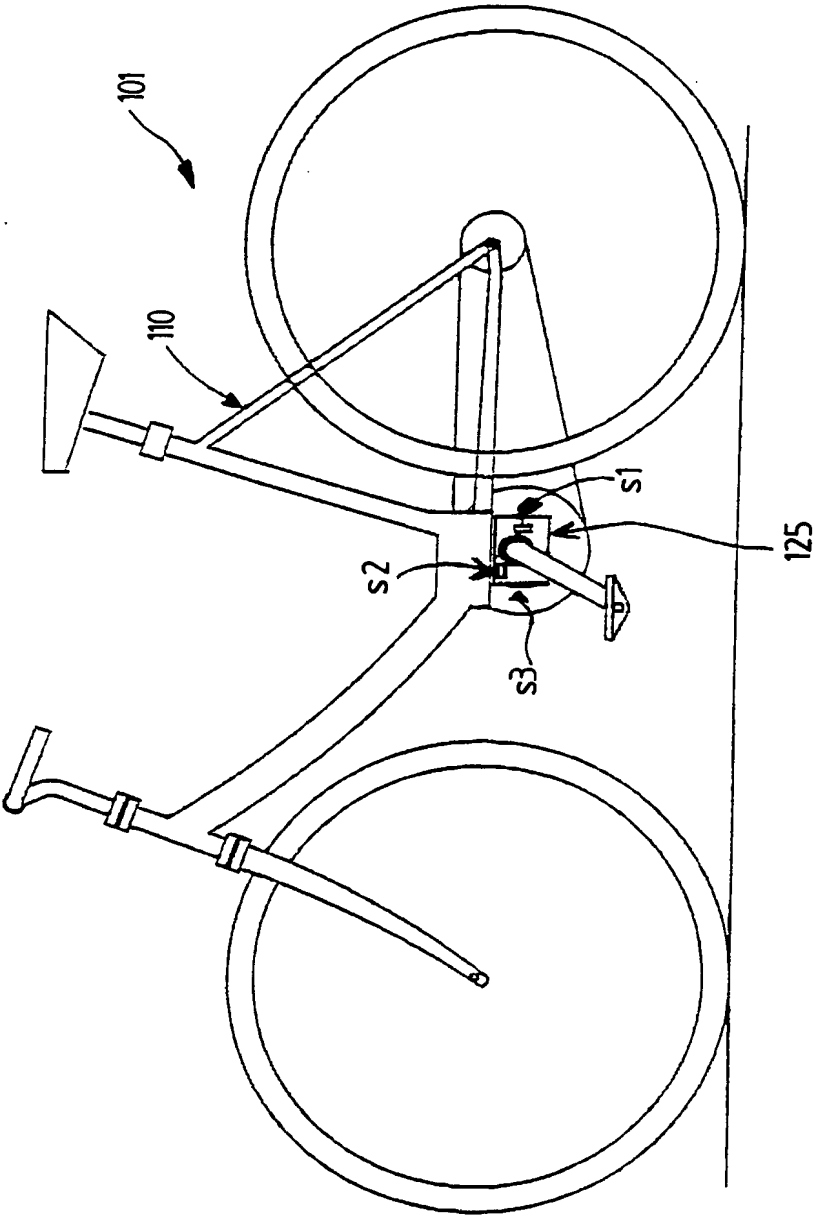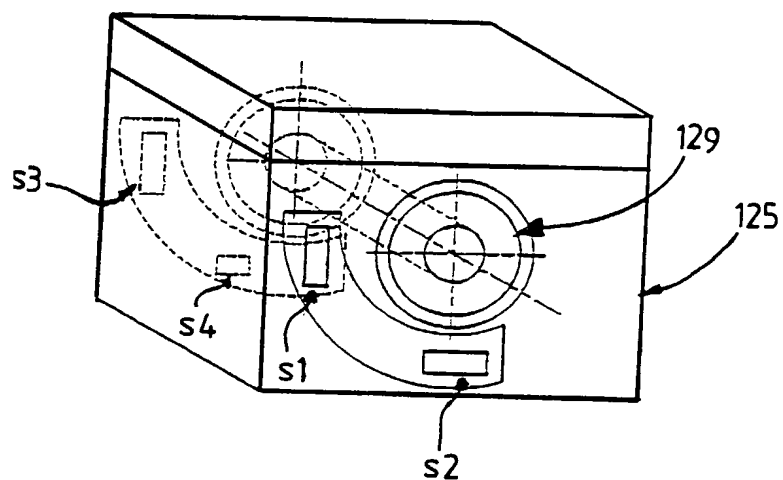
FIG. 9A

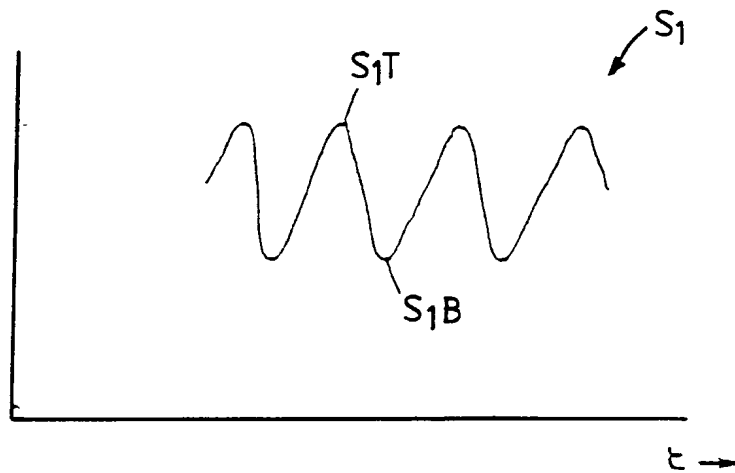
FIG. 9B
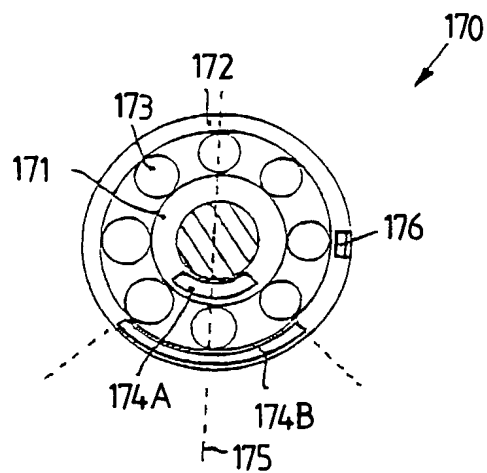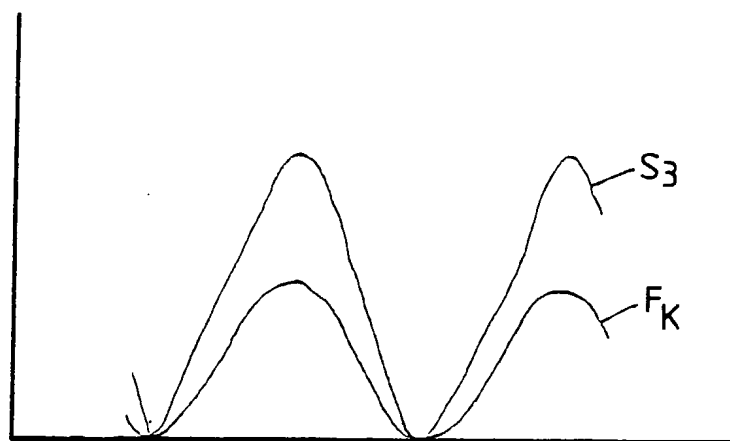
FIG. 10A

FIG. 10B
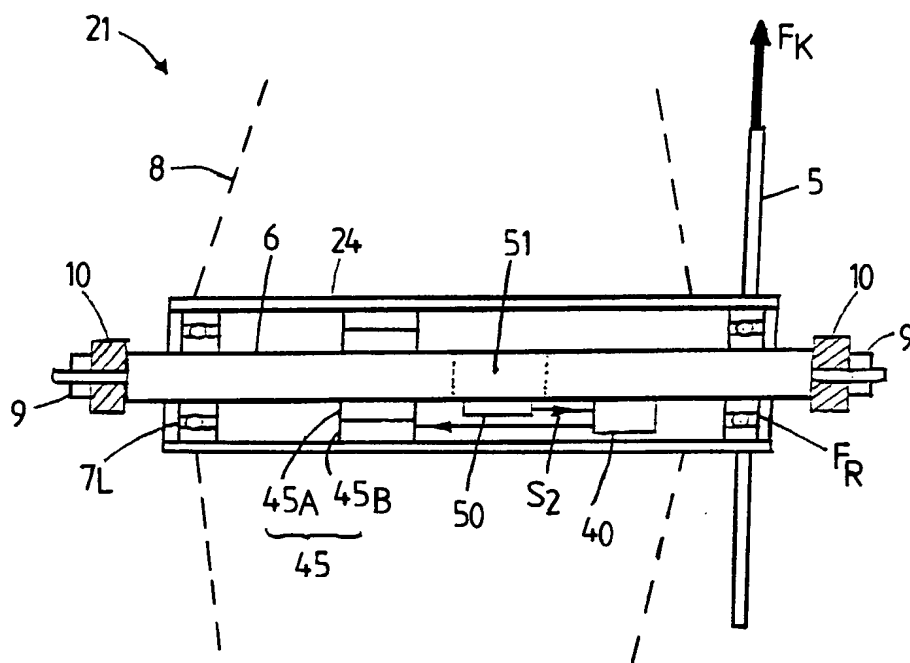
FIG. 11
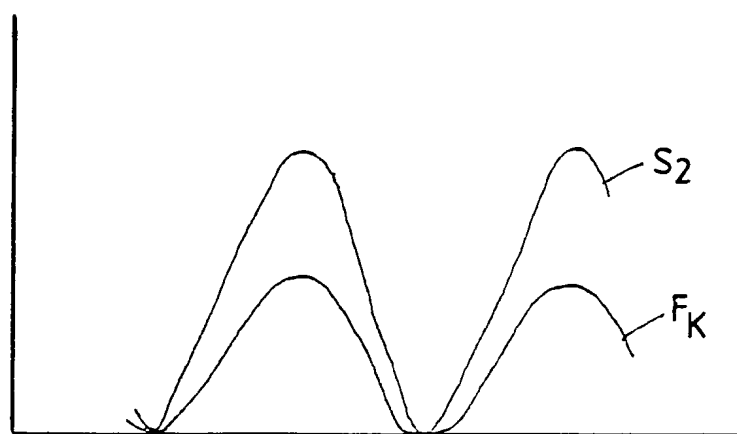
FIG. 12

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B62M23/02 B62M25/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B62M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 11, 28 November 1997 (1997-11-28) & JP 09 175476 A (HONDA MOTOR CO LTD), 8 July 1997 (1997-07-08)	1-3,5,6, 12-14, 18-21, 23,25, 28, 30-33, 38,39, 47-50, 57,58, 63,64,67
A	abstract	8-11,16, 22,24, 26,27, 29,34, 40,51, 59,65

-/--

| X | Further documents are listed in the continuation of box C. | X | Patent family members are listed in annex. |

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 March 2001	21/03/2001

| Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL – 2280 HV Rijswijk
Tel. (+31–70) 340–2040, Tx. 31 651 epo nl,
Fax: (+31–70) 340–3016 | Authorized officer

Grunfeld, M |

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 02, 28 February 1997 (1997-02-28) & JP 08 268372 A (TOKYO R &D:KK), 15 October 1996 (1996-10-15)	1-4,6,7
A	abstract ---	15,16, 21,24
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 339 (M-1284), 22 July 1992 (1992-07-22) & JP 04 100790 A (YAMAHA MOTOR CO LTD), 2 April 1992 (1992-04-02)	60
A	abstract ---	29,34,40
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 09, 30 September 1996 (1996-09-30) & JP 08 113185 A (OKAMURA KENKYUSHO:KK;POWER SYST:KK; JEOL LTD), 7 May 1996 (1996-05-07) abstract ---	7,36,37
A	EP 0 831 021 A (SHIMANO KK) 25 March 1998 (1998-03-25) claims; figures ---	26,27
A	DE 197 41 709 A (WIEHR JUERGEN DIPL FINANZW) 25 March 1999 (1999-03-25) claims; figures -----	26,27

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 09175476	A	08-07-1997	NONE		
JP 08268372	A	15-10-1996	NONE		
JP 04100790	A	02-04-1992	JP	3086475 B	11-09-2000
JP 08113185	A	07-05-1996	NONE		
EP 0831021	A	25-03-1998	JP	10095384 A	14-04-1998
			US	6015159 A	18-01-2000
DE 19741709	A	25-03-1999	NONE		